



BNC STRAIGHT CRIMP / CRIMP PLUG 10-005-A2-AI

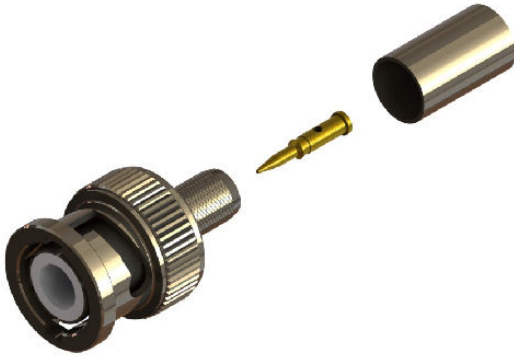


Images for illustration purposes only

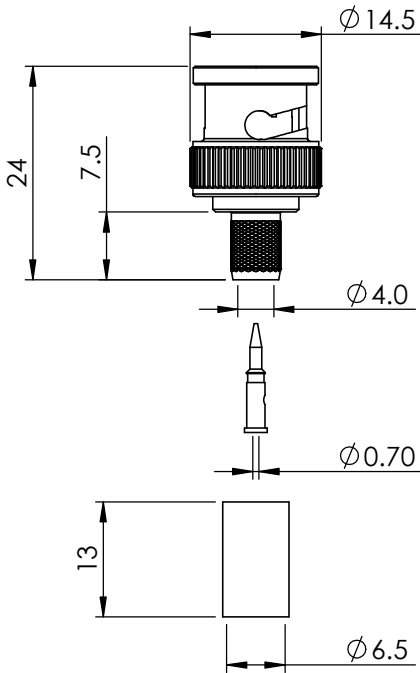

Suitable for Cables:

RG59, URM104, URM70, RG62, KX6, KX52, KX30

Stripping Dimensions



a = 4.0 mm
b = 8.0 mm
c = 16.0 mm
d = 12.0 mm

Assembly Procedure: AP001

Tooling

Centre Contact: Hex 1.72mm A/F Tool No: 336A

Crimp Sleeve: Hex 6.50mm A/F Tool No: 336A

Environmental Specification

Operating Temp: -30 to +70 Deg C.

IP Rating (Mated):

Electrical Specification


Impedance: 50 Ohm
Frequency: 0-1 GHz
Dielectric W/V: 1500 Veff
Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 10 N min
Cable Retention: 120 N min
Mating cycles: 250
Weight: 10.20 g


Connector Interface

Image for illustration purposes only



-22.4 dB @ 1.0 GHz
-16.4 dB @ 2.0 GHz
-12.8 dB @ 3.0 GHz

Return Loss Graph

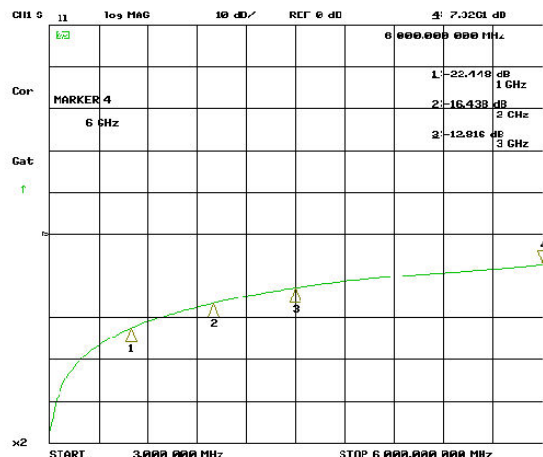

9	CRIMP SLEEVE	BRASS	NICKEL
8	CENTRE CONTACT	BRASS	GOLD
7	BODY	ZINC	NICKEL
6	WASHER	Fe	NICKEL
5	SPRING	SK5	NICKEL
4	INNER RETAINING RING	SK5	NICKEL
3	GASKET	SILICONE	N/A
2	INSULATOR	DELTRIN	N/A
1	BAYONET CAP	ZINC	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING
A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES	
REVISION :	A00	NAME	SIGNATURE
ISSUE :	1	DATE	
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR		DRAWN	GE
		CHK'D	PS
		APPV'D	
<small>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</small>			