

Electronic housing - ME MAX 22,5 SF G 2-2 BU - 2199485

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Complete housing without vents, Complete housing, Cross connection: DIN rail bus connector, color: blue, width: 22.5 mm, length: 85 mm, height: 70.4 mm, number of positions cross connector: 5


The figure shows the gray version

Why buy this product

- Item is from the ME-MAX product range
- Easy mounting
- Available in overall widths from 6.2 mm to 90 mm, modular extension is possible
- Inflammability class V0 according to UL 94
- Variety of connection technologies
- Can be mounted on the DIN rail
- Optional with bus connector for DIN rail mounting as well as power connection system



Key Commercial Data

Packing unit	50 STK
Minimum order quantity	500 STK
GTIN	 4 046356 341844
GTIN	4046356341844
Weight per Piece (excluding packing)	33.190 g
Custom tariff number	85389099
Country of origin	Germany
Note	Made to Order (non-returnable)

Technical data

General

Housing type	Complete housing
Housing material	Polyamide
Color (RAL)	blue

Electronic housing - ME MAX 22,5 SF G 2-2 BU - 2199485

Technical data

Ambient conditions

Ambient temperature (storage/transport)	-40 °C ... 70 °C
Ambient temperature (assembly)	-5 °C ... 100 °C
Ambient temperature (operation)	-40 °C (depending on power dissipation)

Dimensions

Length	85 mm
Constructional height	70.4 mm
Width	22.5 mm
Depth	85 mm

Technical data

Power dissipation without gap	5.5 W
Power dissipation with 20 mm gap	9.6 W
Number of positions	16

Standards and Regulations


Flammability rating according to UL 94	V0
--	----

Environmental Product Compliance


China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Dimensional drawing

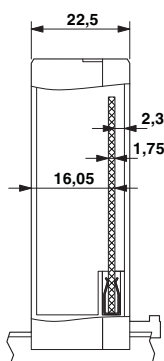

Dimensional drawing

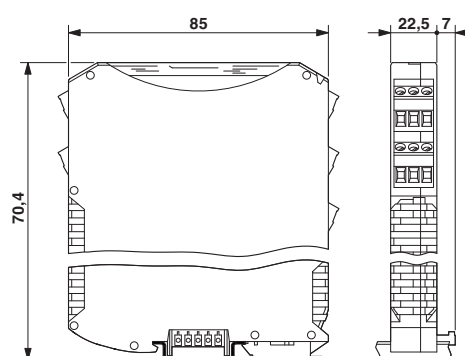

Housing inner dimensions ME MAX... Flat/extra-flat

Classifications

eCl@ss

eCl@ss 4.0	27180401
eCl@ss 4.1	27180401
eCl@ss 5.0	27180506

Electronic housing - ME MAX 22,5 SF G 2-2 BU - 2199485

Classifications

eCl@ss

eCl@ss 5.1	27180506
eCl@ss 6.0	27180802
eCl@ss 7.0	27182702
eCl@ss 8.0	27182702
eCl@ss 9.0	27182702

ETIM

ETIM 3.0	EC001031
ETIM 4.0	EC001031
ETIM 5.0	EC001031
ETIM 6.0	EC001031

UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501

Approvals

Approvals

Approvals

UL Recognized

Ex Approvals

Approval details

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 240868
---------------	--	---	---------------

Accessories

Accessories

Ground contact

Electronic housing - ME MAX 22,5 SF G 2-2 BU - 2199485

Accessories

Electronic housing - ME FE-CONTACT - 2908294



Functional earth ground contact, for intermediate elements.

Phoenix Contact 2017 © - all rights reserved
<http://www.phoenixcontact.com>