

# DIN rail bus connectors - TBUS8-18,8-PPPPPPP-7035 - 2202396

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Plug component, nominal current: 6 A, rated voltage (III/2): 32 V, number of positions: 8, pitch: 2.54 mm, color: light gray



## Why buy this product



## Key Commercial Data

Packing unit	30 STK
Minimum order quantity	30 STK
GTIN	
GTIN	4055626115078
Weight per Piece (excluding packing)	4.840 g
Custom tariff number	85366990
Country of origin	Germany

## Technical data

### Dimensions

Length [ L ]	18.8 mm
Pitch	2.54 mm

### General

Number of positions	8
Insulating material group	I
Rated surge voltage (III/2)	1.5 kV
Rated surge voltage (II/2)	1.5 kV
Rated voltage (III/2)	32 V
Rated voltage (II/2)	32 V
Nominal current $I_N$	6 A
Maximum load current	6 A

# DIN rail bus connectors - TBUS8-18,8-PPPPPPP-7035 - 2202396

## Technical data

### General

Insulating material	PA
Flammability rating according to UL 94	V0 (UL94)

### Standards and Regulations


Flammability rating according to UL 94	V0 (UL94)
----------------------------------------	-----------

### Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

## Drawings

Dimensional drawing

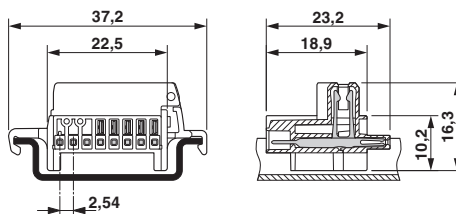

## Classifications

### eCl@ss

eCl@ss 5.1	27260701
eCl@ss 8.0	27440309
eCl@ss 9.0	27440309

### ETIM

ETIM 5.0	EC002638
ETIM 6.0	EC002638

### UNSPSC

UNSPSC 13.2	39121409
-------------	----------