



## Product information MAB 6100 grau/grey 930 954-517


Name	MAB 6100 grau/grey
	panel-mounted socket with locking screw; solder joint; not shielded
Delivery informations	paner-intolnied socket with locking screw, solder joint, not sinelided
Availability	available
Product description	a dama da
Туре	MAB 6100 grau/grey
Order No.	930 954-517
Type of contact	female
Colour	grey
Description	panel-mounted socket with locking screw; solder joint; not shielded
Number of contacts	6
Conductor size	$<= 0.34 \mathrm{mm}^2$
Technical data	<= 0.34 11111
LF output "Phone"	EN 60 130-09
Pole arrangement DIN	DIN 45 322
Rated current	4 A
Rated voltage	AC/DC 34 V
Type of termination	Solder
Material	SUIUCI
Contact material (socket)	brass
Contact surface material	tin plated
Contact bearer material	PA 66/UL standard 94V-2
Housing material	PE PE
Environmental conditions	IL
Protection class (IEC 60529)	IP 30
Temperature range	-20 °C to +60 °C
romporatule range	20 0 to 100 0

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Picture

Drawing

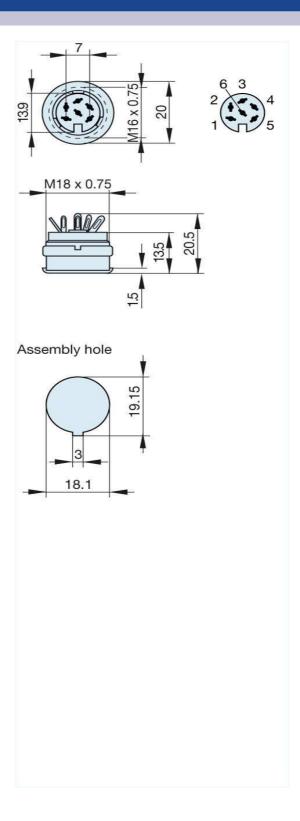

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.