



Product information MAK 4100 UM grau/grey 931 175-117


| Name | MAK 4100 UM grau/grey |
|-----------------------------------|---|
| | |
| | socket with locking screw; solder joint |
| Delivery informations | |
| Availability | available |
| Product description | |
| Туре | MAK 4100 UM grau/grey |
| Order No. | 931 175-117 |
| Type of contact | female |
| Description | socket with locking screw; solder joint |
| Housing Color | grey |
| Number of contacts | 4 |
| Conductor size | $<= 0.34 \text{ mm}^2$ |
| Technical data | |
| LF output "Phone" | EN 60 130-09 |
| Rated current | 4 A |
| Rated voltage | AC/DC 34 V |
| Cable diameter | 5.5 mm |
| Type of termination | solder |
| Material | |
| Contact material (socket) | brass |
| Contact surface material | tin plated |
| Contact bearer material | PA 66/UL standard 94V-2 |
| Housing material | PE |
| Environmental conditions | |
| Protection class (IEC 60529) | IP 30 |
| Temperature range | -20 °C to +60 °C |
| Scope of delivery and accessories | |
| Packaging | industry package, box; individual parts not assembled, sorted |

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Picture

Drawing

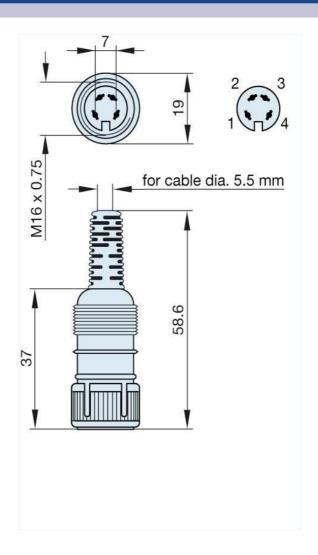

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.