



Product information G 2 KW 1 F 1,5m 931 494-603


Name	G 2 KW 1 F 1,5m
	95
	Cable socket with integrally molded lead
Delivery informations	
Availability	available
Product description	
Description	Cable socket with integrally molded lead
Туре	G 2 KW 1 F 1,5m
Order No.	931 494-603
Type of contact	forked spring
Number of contacts	2
Cable material	PVC
Cable length	1.5 m
Conductor size	2 x 0.75 mm ²
Cable type	H05 RN-F 2X0,75
Standard	DIN VDE 0627 / IEC 61984
Housing Color	black
Technical data	A SOLV / PO 400 V
Rated voltage	AC 50 V / DC 120 V
Rated current	10 A
Contact resistance	<= 4 m0hm
Material	
Contact surface material	Sn St
Contact bearer material	PA PA
Housing material	PA
Environmental conditions	Incr
Protection class (IEC 60529)	IP 65
Pollution severity	3
Temperature range	-40 °C to +90 °C
Inflammability class	94 HB
Housing Contact boorer	94 HB 94 HB
Contact bearer Approvals	34 ND
Approvais VDE	VDE
Packing unit	YUL
Packaging unit	100 pieces
Scope of delivery and accessories	100 proces
Scope of delivery	1 cable socket with integrally molded lead, 1 central screw M 3 x 18, 1 gasket
Accessories to order separately	can be plugged into G 4 E 1 M grau/grey
Accessories to cruei separately	out by prayyou into a + E i m graw grey

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Picture

Drawing

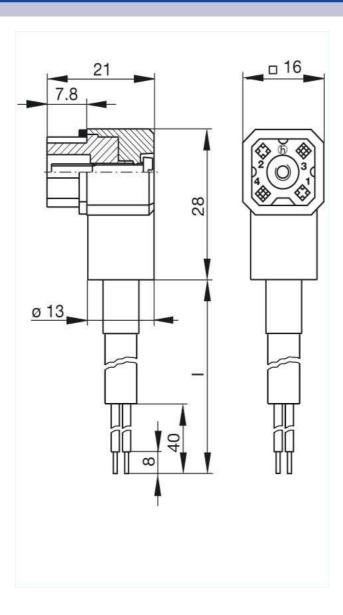

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.