

(h) HIRSCHMANN

Product information GDMC 3011 schwarz/black 931 963-100


Name	GDMC 3011 schwarz/black
Delivery informations	cable socket with central screw M 3 x 35and 4 crimp contacts RBC 630
Availability	available
Product description	
Description	cable socket with central screw M 3 x 35 and 4 crimp contacts RBC 630
Туре	GDMC 3011 schwarz/black
Order No.	931 963-100
Number of contacts	2 + PE / 3 + PE
Cable gland	PG 9/11
Conductor size	max 1.5 mm ²
Standard	DIN EN 175 301-803-A
Housing Color	black
Construction type	A
Technical data	
Pin dimensions	6.3 mm x 0.8 mm x 0.8 mm
Rated voltage	AC/DC 250 V
Rated current	16 A
Contact resistance	<= 4 m0hm
Type of termination	crimp
Suitable cables	4.5 mm to 11 mm diameter
Mounting	central nut
Material	
Contact surface material	Sn
Contact bearer material	PA
Housing material	PA
Environmental conditions	
Protection class (IEC 60529)	IP 65 (gasket necessary)
Pollution severity	3
Temperature range	-40 °C to +125 °C
Inflammability class	
Housing	94 HB
Contact bearer	94 HB
Approvals	
VDE	VDE
CSA	CSA
Packing unit	100-11-11
Packaging unit	100 pieces
Scope of delivery and accessories Accessories to order separately	(NDD) flot apply t CDM 2, 7
Augustines to unuer separately	(NBR) flat gasket GDM 3-7, Order no. 730 801-002; (EPDM) flat gasket GDM 3-21, Order no. 731 739-004;
	profiled gasket GDM 3-16, Order no. 731 531-002:

Order no. 731 531-002; The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Picture



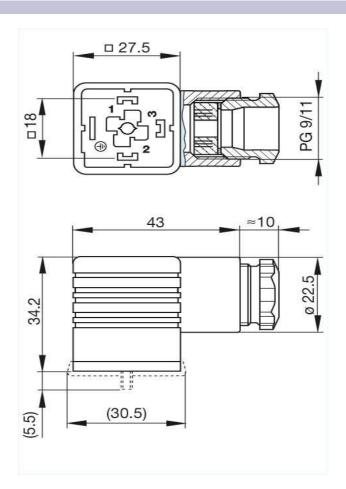

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.