



Product information GDM 2009 schwarz/black 931 965-100


Name	GDM 2009 schwarz/black
Della	cable socket with central screw M 3 x 35
Delivery informations	quailabla
Availability Product description	available
Product description	coble cocket with control corous M 2 v 25
Description	cable socket with central screw M 3 x 35
Type	GDM 2009 schwarz/black
Order No.	931 965-100
Other standard types	grey housing,
Novel or of contrate	Order no. 931 965-106
Number of contacts	2 + PE
Cable gland	PG 9
Conductor size	$max. 1.5 mm^2$
Standard	DIN EN 175 301-803-A
Housing Color	black
Construction type	Α
Technical data	
Pin dimensions	6.3 mm x 0.8 mm, 4.8 mm x 0.8 mm
Rated voltage	AC/DC 250 V
Rated current	16 A
Contact resistance	<= 4 m0hm
Type of termination	screw
Suitable cables	4.5 mm to 7 mm diameter
Mounting	central nut
Material	
Contact surface material	Sn
Contact bearer material	PA PA
Housing material	PA PA
Environmental conditions	
Protection class (IEC 60529)	IP 65 (gasket necessary)
Pollution severity	3
Temperature range	-40 °C to +125 °C
Inflammability class	
Housing	94 HB
Contact bearer	94 HB
Approvals	
VDE	VDE
SEV	SEV
CSA	CSA
Packing unit	
Packaging unit	200 pieces
Scope of delivery and accessories	
Accessories to order separately	(NBR) flat gasket GDM 3-7,
	Order no. 730 801-002;
	(EPDM) flat gasket GDM 3-21,

(EPDM) flat gasket GDM 3-21,
The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Picture

Drawing

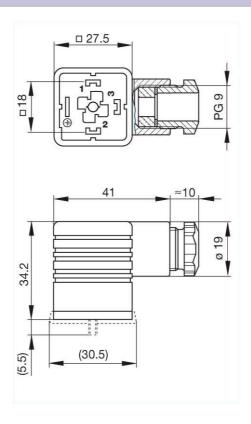

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.