

(h) HIRSCHMANN

Product information GDM 3011 J schwarz/black 932 109-100

Name	GDM 3011 J schwarz/black
	cable socket with central screw M 3 x 35
Delivery informations	
Availability	available
Product description	(Kundo)
Description	cable socket with central screw M 3 x 35
Туре	GDM 3011 J schwarz/black
Order No.	932 109-100
Other standard types	grey housing,
outor outinutin typoo	Order no. 932 109-106
Number of contacts	3 + PE
Cable gland	PG 11
Conductor size	max. 1.5 mm ²
Standard	DIN EN 175 301-803-A
Housing Color	black
	A
Construction type Technical data	A
Pin dimensions	6.3 mm x 0.8 mm, 4.8 mm x 0.8 mm
	AC/DC 250 V
Rated voltage Rated current	16 A
Contact resistance	<= 4 m0hm
Type of termination	screw / cable shoe / cable eye
Suitable cables	6 mm to 9 mm diameter
Mounting	central nut
Material	
Contact surface material	Sn
Contact bearer material	PA
Housing material	РА
Environmental conditions	
Protection class (IEC 60529)	IP 65 (gasket necessary)
Pollution severity	3
Temperature range	-40 °C to +125 °C
Inflammability class	
Housing	94 HB
Contact bearer	94 V0
Approvals	
UR	UR
VDE	VDE STA
SEV	SEV
CSA Realize unit	CSA
Packing unit	
Packaging unit	200 pieces
Scope of delivery and accessories	(NDD) flat appliet CDM 0.7
Accessories to order separately	(NBR) flat gasket GDM 3-7, Order no. 730 801-002;
	(EPDM) flat gasket GDM 3-21.


(EPDM) flat gasket GDM 3-21,

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Picture

Drawing

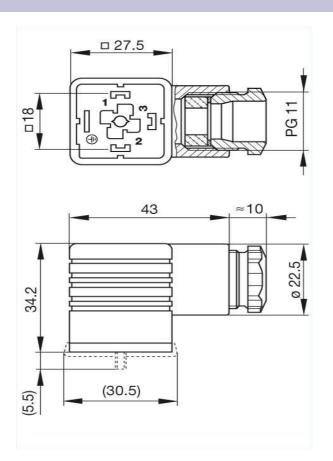

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.