
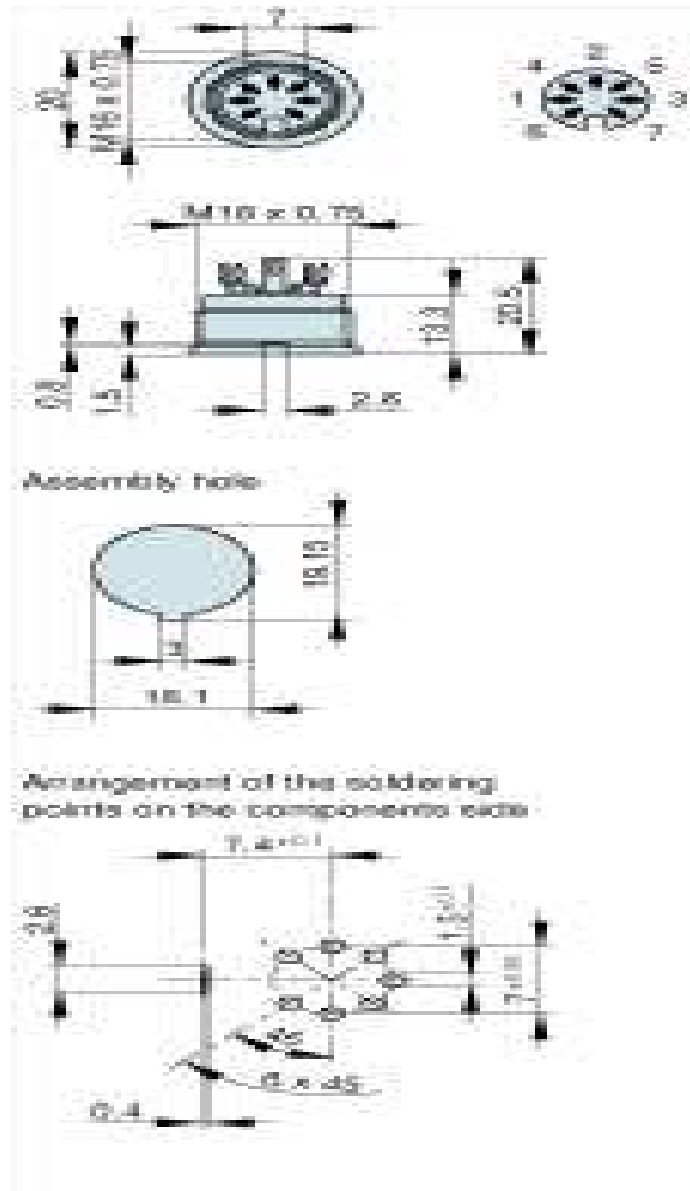




**Product information**  
**MAB 7100 SV grau/grey**  
**932 423-517**

Name		MAB 7100 SV grau/grey
		
		panel-mounted socket with locking screw; for PCB mounting; solder joint; not shielded
Delivery informations		
Availability		available
Product description		
Type		MAB 7100 SV grau/grey
Order No.		932 423-517
Type of contact		female
Colour		grey
Description		panel-mounted socket with locking screw; for PCB mounting; solder joint; not shielded
Number of contacts		7
Conductor size		$\leq 0.34 \text{ mm}^2$
Technical data		
LF output "Phone"		EN 60 130-09
Pole arrangement DIN		DIN 45 329
Rated current		4 A
Rated voltage		AC/DC 34 V
Type of termination		solder
Material		
Contact material (socket)		brass
Contact surface material		tin plated
Contact bearer material		PA 66/UL standard 94V-2
Housing material		PE
Environmental conditions		
Protection class (IEC 60529)		IP 30
Temperature range		-20 °C to +60 °C

Picture  
Drawing



The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.