

b <u>HIRSCHMANN</u>

Product information GSA 2000 A schwarz/black 932 592-500

Name


GSA 2000 A schwarz/black



	appliance connector with retaining nut, without screws, longitudinal slots, closed nut
Delivery informations	
Availability	available
Product description	
Description	appliance connector with retaining nut, without screws, longitudinal slots, closed nut
Туре	GSA 2000 A schwarz/black
Order No.	932 592-500
Number of contacts	2 + PE
Standard	DIN EN 175 301-803-A
Housing Color	black
Construction type	Α
Technical data	
Rated voltage	AC/DC 400 V
Rated current	16 A
Contact resistance	<= 4 m0hm
Type of termination	solder, holes for possibility of soldering on both sides (ground contacts: screw)
Mounting	SCREW
Material	
Contact surface material	Sn
Contact bearer material	PA
Housing material	PA
Environmental conditions	
Protection class (IEC 60529)	IP 65 (gasket necessary) (mated)
Pollution severity	3
Temperature range	-40 °C to +125 °C
Inflammability class	
Contact bearer	94 V-0
Approvals	
UR	UR
VDE	VDE
SEV	SEV
CSA	CSA
Packing unit	
Packaging unit	200 pieces
Scope of delivery and accessories	
Accessories to order separately	(NBR) flat gasket GSA 200-4, Order no. 730 843-002; (EPDM) flat gasket GSA 200-7, Order no. 730 268-003

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



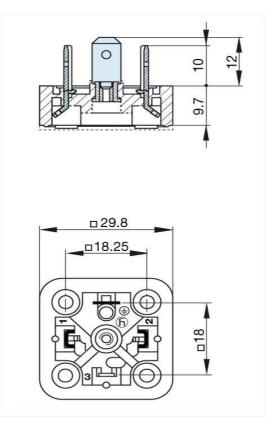

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.

Picture Drawing