



Product information MAB 8 SN V 932 664-200


Name	MAB 8 SN V
	F
	panel-mounted socket for PCBs; plug-in direction parallel to the PCB
Delivery informations	paren-mounted socket for FGBs, plug-in direction paranet to the FGB
Availability	available
Product description	available
Type	MAB 8 SN V
Order No.	932 664-200
Type of contact	female
Description	panel-mounted socket for PCBs; plug-in direction parallel to the PCB
Number of contacts	8
Conductor size	
	$<= 0.34 \text{ mm}^2$
Technical data	F140 40 90
LF output "Phone"	EN 60 130-09
Pole arrangement DIN	DIN 45 326
Rated current	4A
Rated voltage	AC/DC 34 V
Type of termination	solder
Material	
Contact material (socket)	brass
Contact surface material	tin plated
Contact bearer material	PA 66/UL standard 94V-2
Housing material	steel, nickel-plated
Environmental conditions	
Protection class (IEC 60529)	IP 30
Temperature range	-20 °C to +60 °C

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Picture

Drawing

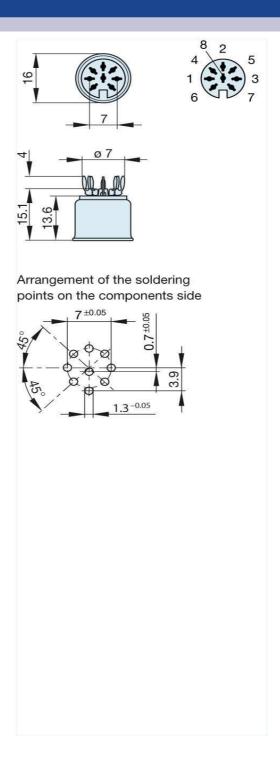

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.