



Product information GO 60 FAV M schwarz/black 932 918-100


| Name | GO 60 FAV M schwarz/black |
|-----------------------------------|--|
| | |
| | |
| | Surface mounted connector with flange with solder contacts |
| Delivery informations | |
| Availability | available |
| Product description | |
| Description | Surface mounted connector with flange with solder contacts |
| Туре | GO 60 FAV M schwarz/black |
| Order No. | 932 918-100 |
| Type of contact | blade contacts |
| Number of contacts | 6 |
| Standard | DIN VDE 0627 / IEC 61984 |
| Housing Color | black |
| Technical data | |
| Pin dimensions | 2.8 mm x 0.8 mm |
| Rated voltage | AC/DC 250 V |
| Rated current | 6A |
| Contact resistance | <= 4 m0hm |
| Type of termination | solder |
| Mounting | screws |
| Material | |
| Contact surface material | Sn Sn |
| Contact bearer material | PA |
| Housing material | PA |
| Environmental conditions | |
| Protection class (IEC 60529) | IP 65 |
| Pollution severity | 3 |
| Temperature range | -40 °C to +90 °C |
| Inflammability class | |
| Housing | 94 V-1 |
| Contact bearer | 94 V-1 |
| Packing unit | |
| Packaging unit | 100 pieces |
| Scope of delivery and accessories | |
| Scope of delivery | 1 surface mounted connector, 1 flat gasket |
| Accessories to order separately | can be plugged into GO 60 WF schwarz/black |

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Picture

Drawing

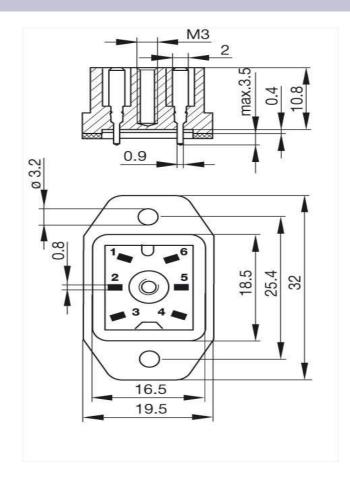

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.