



Product information GSA 2000 N schwarz/black 932 967-100

Name	GSA 2000 N schwarz/black
Delivery informations	appliance connector with retaining nut, 2 screws M 3 x 10 and 1 screw M 3 x 5, open nut
Delivery informations Availability	available
Product description	availaule
Description	appliance connector with retaining nut, 2 screws M 3 x 10 and 1 screw M 3 x 5, open nut
Туре	appliance connector with retaining flut, 2 screws in 3 x 10 and 1 screw in 3 x 5, open flut GSA 2000 N schwarz/black
Order No.	932 967-100
Number of contacts	2 + PE
Standard	DIN EN 175 301-803-A
Housing Color	black
Construction type	A
Technical data	AOIDO MON
Rated voltage	AC/DC 400 V
Rated current	16 A
Contact resistance	<= 4 m0hm
Type of termination	solder (ground contacts: screw)
Mounting	screw
Material	
Contact surface material	Sn
Contact bearer material	PA PA
Housing material	PA
Environmental conditions	
Protection class (IEC 60529)	IP 65 (gasket necessary) (mated)
Pollution severity	3
Temperature range	-40 °C to +125 °C
Inflammability class	Taura
Contact bearer	94 V-0
Approvals	un
UR	UR
VDE	VDE
SEV	SEV
CSA	CSA
Packing unit	1000 et euro
Packaging unit	200 pieces
Scope of delivery and accessories	(NDD) (1-1
Accessories to order separately	(NBR) flat gasket GSA 200-4, Order no. 730 843-002; (EPDM) flat gasket GSA 200-7, Order no. 730 268-003


The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.

Electroustic Ltd www.electroustic.co.uk +44 (0)1908 307200



Picture

Drawing

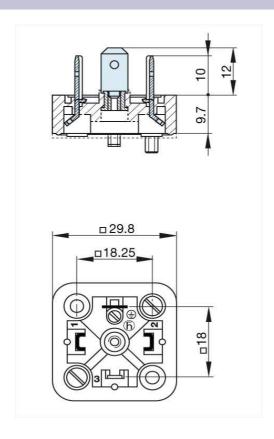

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.