



Product information GMN 209 NJ grau/grey 932 987-106


| Name | GMN 209 NJ grau/grey |
|-----------------------------------|--|
| | |
| | cable socket with central screw M 3 x 35 |
| Delivery informations | |
| Availability | available |
| Product description | |
| Description | cable socket with central screw M 3 x 35 |
| Туре | GMN 209 NJ grau/grey |
| Order No. | 932 987-106 |
| Other standard types | black housing, |
| | Order No. 932 987-100 |
| Number of contacts | 2 + PE |
| Cable gland | PG 9 |
| Cable diameter | PG 9 |
| Conductor size | max. 1.5 mm² |
| Standard | DIN EN 175 301-803-B |
| Housing Color | grey |
| Construction type | В |
| Technical data | |
| Pin dimensions | 6.3 mm x 0.8 mm |
| Rated voltage | AC/DC 250 V |
| Rated current | 16 A |
| Contact resistance | <= 4 m0hm |
| Type of termination | screw / cable shoe / cable eye |
| Suitable cables | 4.5 mm to 7 mm diameter |
| Mounting | central screw |
| Material | |
| Contact surface material | Sn |
| Contact bearer material | PA PA |
| Housing material | PA PA |
| Environmental conditions | |
| Protection class (IEC 60529) | IP 65 |
| Pollution severity | 3 |
| Temperature range | -40 °C to +125 °C |
| Inflammability class | |
| Housing | 94 V-1 |
| Contact bearer | 94 HB |
| Approvals | |
| UR | UR |
| VDE | VDE |
| SEV | SEV |
| CSA | CSA (not for interrupt current) |
| Packing unit | |
| Packaging unit | 200 pieces |
| Scope of delivery and accessories | |
| Accessories to order separately | (NBR) flat gasket GMN 209-3, Order No. 733 273-002; |

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Picture

Drawing

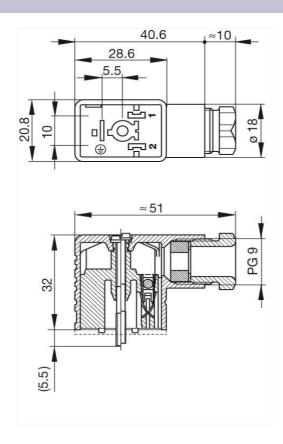

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.