

## **h** <u>HIRSCHMANN</u>

Product information GDS 307 grau/grey 933 024-106

N	laı	ne	

GDS 307 grau/grey




	cable socket with central screw M 3 x 28	
Delivery informations		
Availability	available	
Product description	1	
Description	cable socket with central screw M 3 x 28	
Туре	GDS 307 grau/grey	
Order No.	933 024-106	
Other standard types	black housing, Order No. 933 024-100	
Number of contacts	3 + PE	
Cable gland	PG 7	
Conductor size	max. 0.75 mm <sup>2</sup>	
Standard	industrial standard (9.4 mm)	
Housing Color	grey	
Construction type	C	
Technical data		
Pin dimensions	2,8 mm x 0,5 mm, 3,6 mm x 0,5 mm	
Rated voltage	AC/DC 250 V	
Rated current	6 A	
Contact resistance	<= 4 m0hm	
Type of termination	screw	
Suitable cables	4.5 mm to 6 mm diameter	
Mounting	central screw	
Material		
Contact surface material	Sn	
Contact bearer material	PA	
Housing material	PA	
Environmental conditions		
Protection class (IEC 60529)	IP 65	
Pollution severity	3	
Temperature range	-40 °C to +125 °C	
Inflammability class		
Housing	94 HB	
Contact bearer	94 V-2	
Approvals		
UR	UR	
VDE	VDE	
SEV	SEV	
CSA	CSA	
Packing unit		
Packaging unit	200 pieces	
Scope of delivery and accessories	(NDD) flat analyst CDC 207-2, Order No. 720-19E-002, (EDDN) flat analyst CDC 207-4, Order No. 720-214, 004	
Accessories to order separately	(NBR) flat gasket GDS 307-2, Order No. 730 185-002; (EPDM) flat gasket GDS 307-4, Order No. 730 314-004	

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Picture Drawing

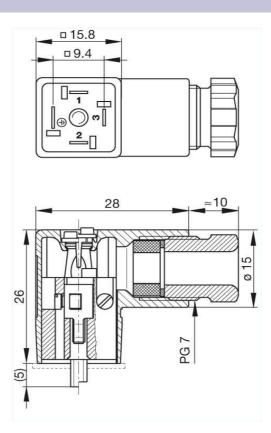

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.