



Product information ELKE 412 PG9 Sn 933 039-100


Name	ELKE 412 PG9 Sn
	Screw-in appliance socket, PG 9 front mounting thread, with wire ends, screw locking, 0-ring included
Delivery informations	
Availability	no longer available
Product description	
Description	Screw-in appliance socket, PG 9 front mounting thread, with wire ends, screw locking, 0-ring included
Туре	ELKE 412 PG9 Sn
Order No.	933 039-100
Type of contact	female
Number of contacts	4
Cable material	PVC
Cable length	0.2 m
Conductor size	0.34 mm ²
Standard	IEC 61076-2-101 (Ed. 1)/ IEC 60947-5-2
Housing Color	metallic
Technical data	incland
Wire stranding	7 x 0.25 mm
Rated voltage	AC/DC 250 V
Rated current	4 A
Material	44
Contact material	Cu Zn
Contact surface material	Sn PA
Contact bearer material	
Housing material	Cu Zn/Ni
0-Ring	NBR
Environmental conditions	In ex
Protection class (IEC 60529)	IP 67
Pollution severity	3
Temperature range	-25 °C to +90 °C
Inflammability class	Tour o
Contact bearer	94 V-2
Approvals	Tur.
UL .	UL
Packing unit	100 divis
Packaging unit	100 pieces
Scope of delivery and accessories	Total de la Maria
Accessories to order separately	protective cap M12 VS,
	order no. 734 209-100;
	fastening nut ELST M PG9,
	order no. 733 877-001

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Picture

Drawing

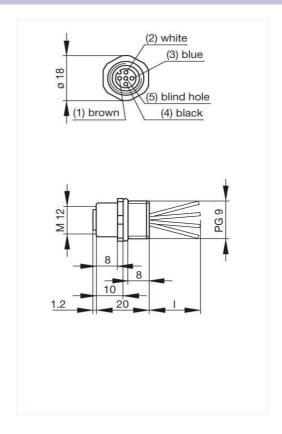

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.