



Product information GSR-U 3000 LO schwarz/black 933 376-100

Name	GSR-U 3000 LO schwarz/black
	appliance connector for injection molding (IP 65 unmated) with solder lug for flexible cables
Delivery informations	1 22
Availability	available
Product description	
Description	appliance connector for injection molding (IP 65 unmated) with solder lug for flexible cables
Туре	GSR-U 3000 LO schwarz/black
Order No.	933 376-100
Number of contacts	3 + PE
Standard	DIN EN 175 301-803-A
Housing Color	black
Construction type	A
Technical data	
Rated voltage	AC/DC 400 V
Rated current	16 A
Contact resistance	<= 4 m0hm
Type of termination	solder
Mounting	for molding
Material	
Contact surface material	Sn
Contact bearer material	PA
Housing material	PA PA
Environmental conditions	
Protection class (IEC 60529)	IP 65 (gasket necessary)
Pollution severity	3
Temperature range	-40 °C to +125 °C
Inflammability class	

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.

94 V-0

200 pieces

UR

Contact bearer

Approvals


Packing unit

Packaging unit



Picture

Drawing

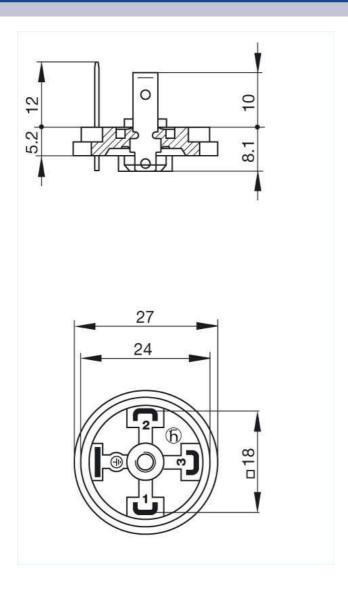

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.