



Product information GSA-U 2000 N LO schwarz/black 933 378-100


Name	GSA-U 2000 N LO schwarz/black
	molded appliance coupler (IP 65 enclosure) with 4 cross-head screws and solder lug for flexible cables
Delivery informations	monded applicance coupled (if 00 enclosure) with 4 cross-nead sciews and soldering for nextone cables
Availability	available
·	availaute
Product description	molded analignes counter (ID CE analogues) with 4 areas had corous and colder lug for flowible cobles
Description	molded appliance coupler (IP 65 enclosure) with 4 cross-head screws and solder lug for flexible cables
Type	GSA-U 2000 N LO schwarz/black
Order No.	933 378-100
Number of contacts	2 + PE
Standard	DIN EN 175 301-803-A
Housing Color	black
Construction type	A
Technical data	
Rated voltage	AC/DC 400 V
Rated current	16 A
Contact resistance	<= 4 m0hm
Type of termination	solder
Mounting	screw
Material	
Contact surface material	Sn
Contact bearer material	PA
Housing material	PA
Environmental conditions	
Protection class (IEC 60529)	IP 65 (gasket necessary)
Pollution severity	3
Temperature range	-40 °C to +125 °C
Inflammability class	
Contact bearer	94 HB
Approvals	
UR	UR
Packing unit	
Packaging unit	200 pieces
Scope of delivery and accessories	
Accessories to order separately	(NBR) flat gasket GSA 200-4,
, , , , , , , , , , , , , , , , , , ,	Order no. 730 843-002;
	(EPDM) flat gasket GSA 200-7,
	Order no. 730 268-003

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Picture

Drawing

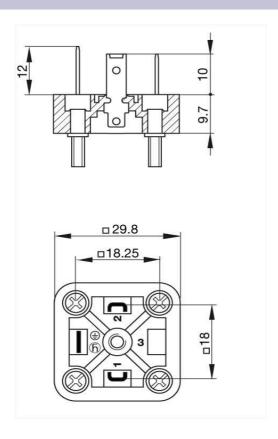

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.