

## **h** <u>HIRSCHMANN</u>

Product information ELWIST 3008 V 933 408-100

Name


ELWIST 3008 V



	Angled cable plug, unassembled, strain relief by means of clamping cage	
Delivery informations		
Availability	available	
Product description		
Description	Angled cable plug, unassembled,	
	strain relief by means of clamping cage	
Туре	ELWIST 3008 V	
Order No.	933 408-100	
Type of contact	male	
Number of contacts	3	
Cable gland	M 9.5 x 1	
Standard	IEC 61076-2-101 (Ed. 1)/ IEC 60947-5-2	
Housing Color	black	
Technical data		
Pin dimensions	1 mm	
Rated voltage	AC/DC 60 V	
Rated current	3A (2 A at 0.14 mm <sup>2</sup> )	
Type of termination	pin penetration	
Suitable cables	diameter 4 mm to 5 mm / 0.14 mm <sup>2</sup> to 0.34 mm <sup>2</sup>	
Core isulation of connecting leads	PVC, PETP,	
	diameter 1.0 mm to 1.55 mm	
Material		
Contact material	Cu Zn	
Contact surface material	Au	
Contact bearer material	PA	
Housing material	PA	
Coupling nut material	Zn Al/Ni	
0-Ring	Viton / NBR	
Environmental conditions		
Protection class (IEC 60529)	IP 67	
Pollution severity	3	
Temperature range	-25 °C to +70 °C	
Inflammability class		
Housing	94 V-2	
Contact bearer	94 V-2	
Packing unit		
Packaging unit	100 pieces	

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



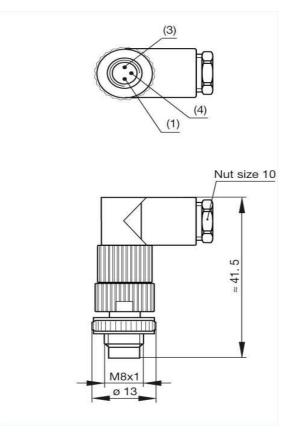

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.

Picture Drawing