



Product information EF12L5 Au


| Name | EF12L5 Au |
|---|---|
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | Vertical appliance socket for combined front panels and circuit board installation with 2 metal screws, 2 x 0-rings |
| Delivery informations | Tornous appression source to some more parious and orione source modulation than a modulous orione, and original |
| Availability | available |
| Product description | |
| Description | Vertical appliance socket for combined front panels and circuit board installation with 2 metal screws, 2 x 0-rings |
| Туре | EF12L5 Au |
| Order No. | 933 551-200 |
| Type of contact | female |
| Number of contacts | 5 |
| Standard | IEC 61076-2-101 (Ed. 1)/ IEC 60947-5-2 |
| Housing Color | metallic |
| Technical data | |
| Rated voltage | AC/DC 50 V |
| Rated current | 4 A |
| Type of termination | solder, solid pins diameter 1 mm |
| Material | |
| Contact material | Cu Zn |
| Contact surface material | Au |
| Contact bearer material | PA |
| Housing material | Cu Zn/Ni |
| 0-Ring | NBR |
| Environmental conditions | IP 68 |
| Protection class (IEC 60529) | |
| Pollution severity | 3 -25 °C to +90 °C |
| Temperature range Inflammability class | -20 UU+8U U |
| Contact bearer | 94 V-2 |
| Approvals | 07 ¥ £ |
| UL | UL pending |
| Packing unit | |
| Packaging unit | 100 pieces |
| Scope of delivery and accessories | |
| Accessories to order separately | protective cap M12 VS, order no. 734 209-100 |

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price-related/commercial respect.



Picture

Drawing

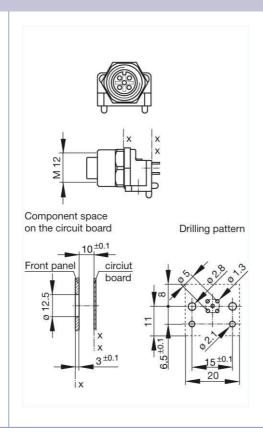

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price-related/commercial respect.