



## Product information GML 209 NJ LED 230 YE grau/grey 933 713-106


Name	GML 209 NJ LED 230 YE grau/grey
	function indicator (LED) with freewheeling diode
Delivery informations	
Availability	available
Product description	
Description	function indicator (LED) with freewheeling diode
Туре	GML 209 NJ LED 230 YE grau/grey
Order No.	933 713-106
Other standard types	transparent housing, locking screw black: Order No. 933 713-100
Number of contacts	2 + PE
Cable gland	PG 9 (grey)
Conductor size	max. 1.5 mm²
Standard	industrial standard (11 mm)
Housing Color	transparent
Construction type	В
Description of Wiring	
LED color	LED yellow
Technical data	
Pin dimensions	6.3 mm x 0.8 mm
Rated voltage	AC/DC 250 V
Rated current	8.4
Contact resistance	<= 4 m0hm
Type of termination	screw / cable shoe / cable eye
Suitable cables	4.5 mm to 7 mm diameter
Mounting	central screw
Material	
Contact surface material	Sn Sn
Contact bearer material	PA
Housing material	PA
Environmental conditions	
Protection class (IEC 60529)	IP 65
Pollution severity	3
Temperature range	-40 °C to +90 °C
Inflammability class	
Housing	94 V-1
Contact bearer	94 HB
Approvals	
UR	UR
VDE	VDE
Packing unit	
Packaging unit	50 pieces
Scope of delivery and accessories	
Accessories to order separately	(NBR) flat gasket GM 207-3, Order No. 731 423-002; knurled screw GDM 3011-8, Order No. 732 574-001; stainless steel screw GDM 3011 RF-1, Order No. 734 363-001
information with the bod bod bod.	

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Picture

Drawing

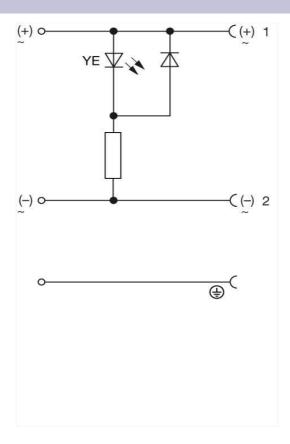

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.