



Product information ELST 4012 K PG7 933 727-100


Name	ELST 4012 K PG7
	Straight cable plug, unassembled, strain relief by means of clamping cage, plastic coupling thread
Delivery informations	Straight cable plug, that semined, strain telefully intensity or manipulg cage, plastic coupling threat
Availability	available
Product description	
Description	Straight cable plug, unassembled,
-	strain relief by means of clamping cage,
	plastic coupling thread
Туре	ELST 4012 K PG7
Order No.	933 727-100
Type of contact	male
Number of contacts	4
Cable gland	PG 7
Standard	IEC 61076-2-101 (Ed. 1)/ IEC 60947-5-2
Housing Color	black
Technical data	
Pin dimensions	1 mm
Rated voltage	AC/DC 250 V
Rated current	4 A
Type of termination	screw
Suitable cables	diameter 4 mm to 6 mm, max. 0.75 mm ²
Material	
Contact material	Cu Zn
Contact surface material	Sn Sn
Contact bearer material	PA PA
Housing material	PA
Coupling nut material	PA
0-Ring	NBR
Environmental conditions	
Protection class (IEC 60529)	IP 67
Pollution severity	3
Temperature range	-25 °C to +90 °C
Inflammability class	
Housing	94 V-2
Contact bearer	94 V-2
Packing unit	
Packaging unit	100 pieces

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Picture

Drawing

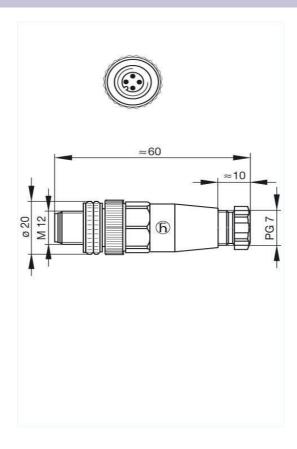

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.