



Product information GML 209 NJ LED 24 schwarz/black 933 928-100


Name	GML 209 NJ LED 24 schwarz/black
	function indicator (LED) with freewheeling diode
Delivery informations	
Availability	available
Product description	funding in the land (FD) with fundamental and
Description	function indicator (LED) with freewheeling diode
Type	GML 209 NJ LED 24 schwarz/black
Order No.	933 928-100
Other standard types Number of contacts	transparent housing, cable gland grey: Order No. 933 928-106 2 + PE
Cable gland	PG 9 (black)
Conductor size	max. 1.5 mm ²
Standard	industrial standard (11 mm)
Housing Color	transparent
Construction type	В
Description of Wiring	
LED color	LED red
Technical data	
Pin dimensions	6.3 mm x 0.8 mm
Rated voltage	AC/DC 24 V
Rated current	8 A
Contact resistance	<= 4 m0hm
Type of termination	screw / cable shoe / cable eye
Suitable cables	4.5 mm to 7 mm diameter
Mounting	central screw
Material	
Contact surface material	Sn Sn
Contact bearer material	PA PA
Housing material	PA
Environmental conditions Protection close (IEC 60530)	In cc
Protection class (IEC 60529)	IP 65
Pollution severity	
Temperature range Inflammability class	-40 °C to +90 °C
Housing	94 V-1
Contact bearer	94 HB
Approvals	
UR	UR UR
VDE	VDE
Packing unit	
Packaging unit	50 pieces
Scope of delivery and accessories	
Accessories to order separately	(NBR) flat gasket GM 207-3, Order No. 731 423-002; knurled screw GDM 3011-8, Order No. 732 574-001; stainless steel screw GDM 3011 RF-1, Order No. 732 574-001; stainless screw GDM 3011 RF-1, Order No. 732 574-001; stainless screw GDM 3011 RF-1, Order No. 732 574-001; stainless screw GDM 3011 RF-1, Order N
	734 363-001

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Picture

Drawing

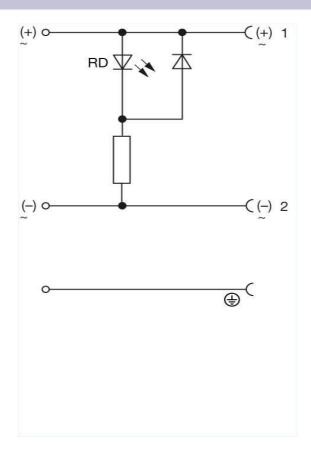

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.