




Product information
GML 209 NJ LED 24 VR YE schwarz/black
933 929-100

Name	
GML 209 NJ LED 24 VR YE schwarz/black	
	
function indicator (LED) with freewheeling diode and protective circuit (varistor)	
Delivery informations	
Availability	available
Product description	
Description	function indicator (LED) with freewheeling diode and protective circuit (varistor)
Type	GML 209 NJ LED 24 VR YE schwarz/black
Order No.	933 929-100
Other standard types	transparent housing, cable gland grey; Order No. 933 929-106
Number of contacts	2 + PE
Cable gland	PG 9 (black)
Conductor size	max. 1.5 mm ²
Standard	industrial standard (11 mm)
Housing Color	transparent
Construction type	B
Description of Wiring	
LED color	LED yellow
Suppressor	Varistor
Technical data	
Pin dimensions	6.3 mm x 0.8 mm
Rated voltage	AC/DC 24 V
Rated current	8 A
Contact resistance	<= 4 mOhm
Type of termination	screw / cable shoe / cable eye
Suitable cables	4.5 mm to 7 mm diameter
Mounting	central screw
Material	
Contact surface material	Sn
Contact bearer material	PA
Housing material	PA
Environmental conditions	
Protection class (IEC 60529)	IP 65
Pollution severity	3
Temperature range	-40 °C to +90 °C
Inflammability class	
Housing	94 V-1
Contact bearer	94 HB
Approvals	
UR	UR
VDE	VDE
Packing unit	
Packaging unit	50 pieces

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.

Scope of delivery and accessories

Picture
Drawing

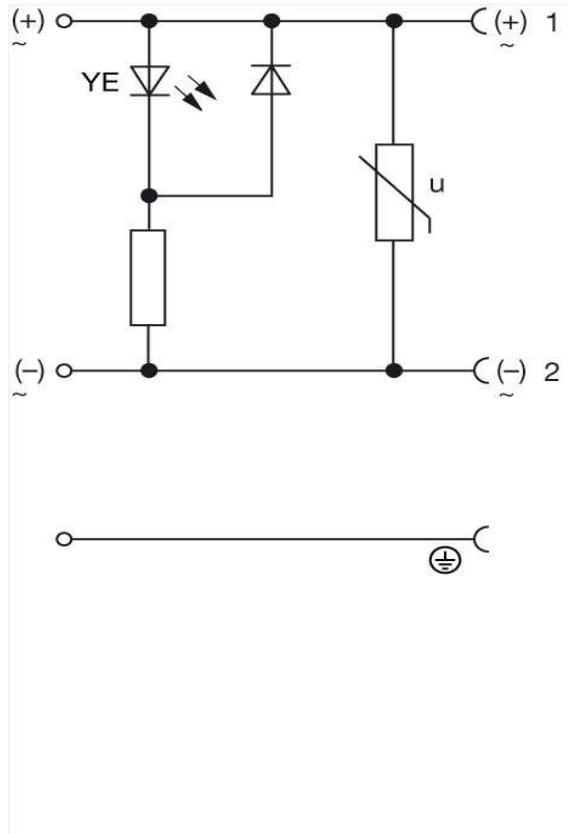

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.