



Product information GML 209 NJ LED 120 VR YE schwarz/black 933 934-100

| Name | GML 209 NJ LED 120 VR YE schwarz/black |
|------------------------------|--|
| | |
| | |
| | function indicator (LED) with freewheeling diode |
| Delivery informations | |
| Availability | available |
| Product description | |
| Description | function indicator (LED) with freewheeling diode |
| Туре | GML 209 NJ LED 120 VR YE schwarz/black |
| Order No. | 933 934-100 |
| Other standard types | transparent housing, cable gland grey: Order No. 933 934-106 |
| Number of contacts | 2 + PE |
| Cable gland | PG 9 (black) |
| Conductor size | max. 1.5 mm² |
| Standard | industrial standard (11 mm) |
| Housing Color | transparent |
| Construction type | В |
| Description of Wiring | |
| LED color | LED yellow |
| Suppressor | Varistor |
| Technical data | |
| Pin dimensions | 6.3 mm x 0.8 mm |
| Rated voltage | AC/DC 120 V |
| Rated current | 8A |
| Contact resistance | <= 4 m0hm |
| Type of termination | screw / cable shoe / cable eye |
| Suitable cables | 4.5 mm to 7 mm diameter |
| Mounting | central screw |
| Material | VOINTE GOLGE |
| Contact surface material | Sn Sn |
| Contact bearer material | PA |
| Housing material | PA PA |
| Environmental conditions | |
| Protection class (IEC 60529) | IP 65 |
| Pollution severity | 3 |
| Temperature range | -40 °C to +90 °C |
| Inflammability class | 10 0 10 10 0 |
| Housing | 94 V-1 |
| Contact bearer | 94 HB |
| Approvals | V-1100 |
| UR | UR |
| VDE | VDE |
| Packing unit | 10L |
| Packaging unit | 50 pieces |
| i auraging unit | ου μισσού |


The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Scope of delivery and accessories

Picture

Drawing

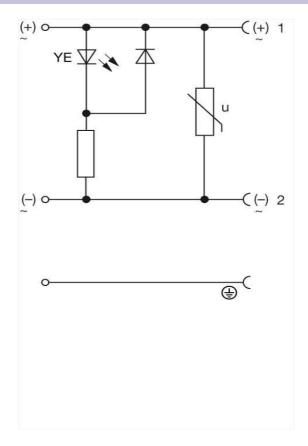

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.