

h <u>HIRSCHMANN</u>

Product information ELST 500/12 093 Sn 934 267-206

ELST 500/12 093 Sn




	Appliance connector for M12 sensors, press-in tube mounting
Delivery informations	· *#manies semicores to in the semicores proce in take including
Availability	available
Product description	avanabic
Description	Appliance connector for M12 sensors, press-in tube mounting
Туре	ELST 500/12 093 Sn
Order No.	934 267-206
Other standard types	gold-plated contacts,
	order no. 934 267-106
Type of contact	male
Number of contacts	5
Standard	IEC 61076-2-101 (Ed. 1)/ IEC 60947-5-2
Housing Color	grey
Technical data	
Pin dimensions	1 mm
Rated voltage	AC/DC 50 V
Rated current	4A
Type of termination	solder, concave pins
Suitable cables	max. 0.5 mm ²
Material	
Contact material	Cu Zn
Contact surface material	Sn Sn
Contact bearer material	PA
0-Ring	NBR
Environmental conditions	
Protection class (IEC 60529)	IP 68
Pollution severity	3
Temperature range	-25 °C to +90 °C
Inflammability class	
Contact bearer	94 V-2
Approvals	
UL	UL
Packing unit	
Packaging unit	100 pieces

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.

Name



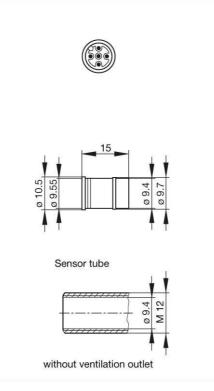

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.

Picture Drawing