



Product information
GML 216 NJ LED 24 VR YE schwarz/black
934 459-002

Name	
GML 216 NJ LED 24 VR YE schwarz/black	
	
function indicator (LED) with freewheeling diode and protective circuit (varistor)	
Delivery informations	
Availability	available
Product description	
Description	function indicator (LED) with freewheeling diode and protective circuit (varistor)
Type	GML 216 NJ LED 24 VR YE schwarz/black
Order No.	934 459-002
Other standard types	transparent housing, cable gland grey; Order No. 934 459-003
Number of contacts	2 + PE
Cable gland	M 16 (black)
Conductor size	max. 1.5 mm ²
Standard	industrial standard (11 mm)
Housing Color	transparent
Construction type	B
Description of Wiring	
LED color	LED yellow
Suppressor	Varistor
Technical data	
Pin dimensions	6.3 mm x 0.8 mm
Rated voltage	AC/DC 24 V
Rated current	8 A
Contact resistance	<= 4 mOhm
Type of termination	screw / cable shoe / cable eye
Suitable cables	4.5 mm to 10 mm diameter
Mounting	central screw
Material	
Contact surface material	Sn
Contact bearer material	PA
Housing material	PA
Environmental conditions	
Protection class (IEC 60529)	IP 65
Pollution severity	3
Temperature range	-40 °C to +90 °C
Inflammability class	
Housing	94 V-1
Contact bearer	94 HB
Approvals	
UR	in preparation
VDE	in preparation
Packaging unit	
Packaging unit	50 pieces

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.


Scope of delivery and accessories

Accessories to order separately

(NBR) flat gasket GM 207-3, Order No. 731 423-002; knurled screw GDM 3011-8, Order No. 732 574-001; stainless steel screw GDM 3011 RF-1, Order No. 734 363-001

Picture

Drawing

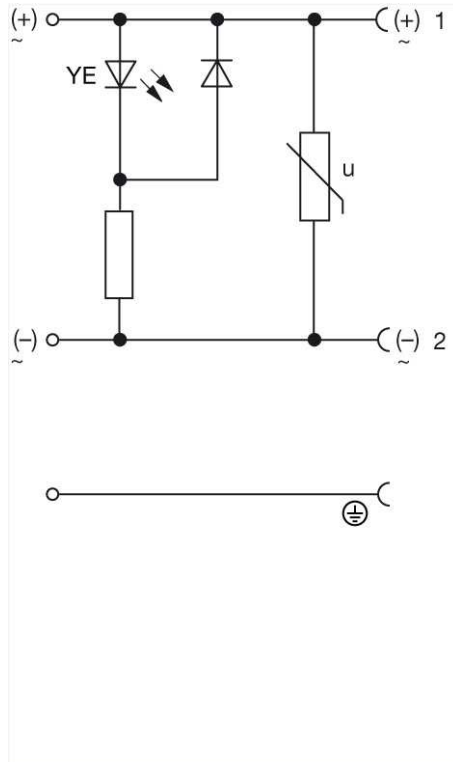

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.