


## SKINTOP® MS-XL

SKINTOP® MS-XL, brass cable gland with wide, variable clamping range, with long connection thread especially for thick walls



Variety of approval certifications

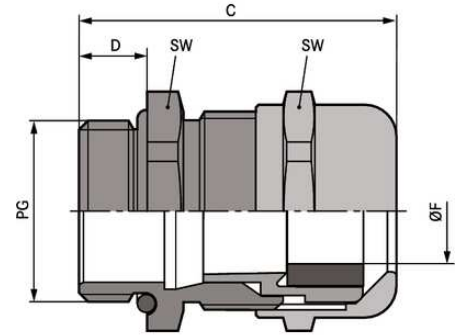

Temperature-resistant



Robust



Optimum strain relief



Mechanical resistance



Good chemical resistance

### Benefits

Especially for thick walls  
High functional reliability  
Wide, variable clamping ranges  
Optimum strain relief

### Application range

With long connection thread for applications with thicker walls.

### Design

PG connection thread

Last Update (19.05.2017)

©2017 Lapp Group - Technical changes reserved

Product Management [www.lappkabel.de](http://www.lappkabel.de)

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02\_03.16

## SKINTOP® MS-XL

### Note

Counter nut to be used: SKINDICHT® SM  
Refer to SKINTOP® PG accessories for suitable accessories

### Technical Data

Classification:	ETIM 5.0 Class-ID: EC000441 ETIM 5.0 Class-Description: Cable gland
Caution:	Refer to T21 for the installation dimensions and tightening torques
Material:	Body: Nickel-plated brass Insert: Polyamide Sealing ring: CR O-ring: NBR
Protection rating:	IP 68 - 10 bar
Temperature range:	dynamic -25°C up to +100°C static -40°C up to +100°C

### Note

Photographs are not to scale and do not represent detailed images of the respective products.  
Prices are net prices without VAT and surcharges. Sale to business customers only.



**SKINTOP® MS-XL**

Article number	Article designation / size	Clamping range ØF (mm)	SW mm	Total length C (mm)	Thread length, D (mm)
SKINTOP® MS-XL					
52115700	PG 7	2 - 6.5	14	32	12
52115710	PG 9	4 - 8	17	35	12
52115720	PG 11	4 - 10	20	38	12
52115730	PG 13,5	5 - 12	22	39.5	12
52115740	PG 16	8 - 14	24	40.5	12
52115750	PG 21	11 - 18	30	45	12
52115760	PG 29	16 - 25	40	52	15

Last Update (19.05.2017)

©2017 Lapp Group - Technical changes reserved

Product Management [www.lappkabel.de](http://www.lappkabel.de)

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02\_03.16