


SKINTOP® DIX-DV

SKINTOP® DIX-DV, PG multiple sealing inserts, prevents water and dust from penetrating unoccupied bore holes



Reliability

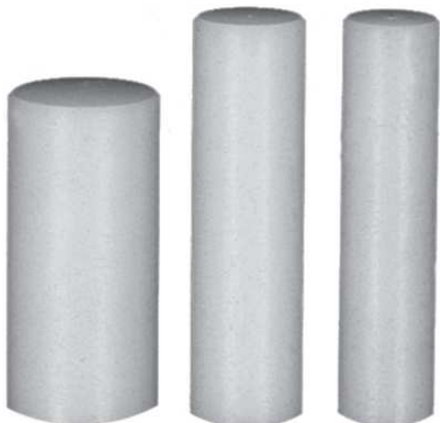

Optimum strain relief



Assembly time

Benefits

Prevents liquid and dirt from penetrating unused bore holes of SKINTOP® DIX multiple sealing inserts

Application range

For inserting into unoccupied holes of the SKINTOP® DIX multiple sealing inserts, which must be sealed to ensure the protection rating.

Note

When assembled professionally and properly, the protection class of IP 68 can be reached

Technical Data

Colour delivered:	natural
Material:	Polyamide
Temperature range:	-40°C to +100°C

Note

Photographs are not to scale and do not represent detailed images of the respective products. Prices are net prices without VAT and surcharges. Sale to business customers only.

**SKINTOP® DIX-DV**

Article number	Article designation / size	Ø F mm	Height (mm)
53100003	DIX-DV 3 x 9	3	9
53100004	DIX-DV 4 x 9	4	9
53100005	DIX-DV 5 x 11	5	11
53100055	DIX-DV 5,5 x 11	5.5	11
53100006	DIX-DV 6 x 14	6	14
53100007	DIX-DV 7 x 14	7	14
53100008	DIX-DV 8 x 14	8	14
53100009	DIX-DV 9 x 14	9	14

Last Update (25.06.2017)

©2017 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16