

SKINTOP® HYGIENIC / SKINTOP® HYGIENIC-R

SKINTOP® HYGIENIC / SKINTOP® HYGIENIC-R, resistant stainless steel cable gland with smooth surfaces for use in the product zone

Info

Ideal for hygienic critical areas - resistant, edge-free, robust and reliable

No gaps, cavities or outer lying thread - so no risk of contamination of food machines, facilities or components.



Temperature-resistant



Mechanical resistance



Wide clamping range



Good chemical resistance



Food & Beverage

Benefits

Hygienic design for optimum cleaning results

Smooth surfaces and no edges prevent the accumulation of fluids and the formation of micro-organisms

Application range

Food machinery, systems and components

For use in the **product zone**

Pharmaceutical industry

Last Update (04.05.2017)

©2017 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16

SKINTOP® HYGIENIC / SKINTOP® HYGIENIC-R**Norm references / approvals****EHEDG (TYPE EL Class I AUX)**

Hygienic design for machinery, apparatus and components

ECOLAB®

Industry standard in the field of professional cleaning and disinfection in the food and beverage industry

FDA 21 CFR 177.2600

Special sealing element for the food and beverage industry in North America

DIN EN 1672-2

Food machines – General principles for design

DIN EN ISO 14159

Security of machinery – hygienic requirements for the design of machinery

Design

Material and shape mean it is easy and safe to clean

The blue colouring makes the sealing material clearly distinguishable from foodstuffs

A complete assembly is easily mounted from the outside

Metric connection thread according to DIN EN 60423

Basis for technical information DIN IEC 62444

Note

UL pending

Installation wrench for very high packing density on request

Technical Data

Classification:	ETIM 5.0 Class-ID: EC000441 ETIM 5.0 Class-Description: Cable gland
Material:	Body: Stainless steel – V4A (1.4404 / 316L) Insert: Polyamide Sealing material: Special elastomer
Protection rating:	IP 68 - 10 bar IP 69
Temperature range:	-20°C to +100°C

Note

Other sizes are available upon request

Photographs are not to scale and do not represent detailed images of the respective products.

Prices are net prices without VAT and surcharges. Sale to business customers only.

**SKINTOP® HYGIENIC / SKINTOP® HYGIENIC-R**

Article number	Article designation / size	Clamping range ØF (mm)	Thread length, D (mm)	SW mm	Total length C (mm)	Thread length, D (mm)
SKINTOP® HYGIENIC						
53105100	M 12 x 1,5	4 - 6	6.5	16	38.4	6.5
53105110	M 16 x 1,5	6.5 - 9	7	20	43.4	7
53105120	M 20 x 1,5	9 - 12	8	24	46.4	8
53105130	M 25 x 1,5	11.5 - 15.5	8	29	48.9	8
SKINTOP® HYGIENIC-R						
53105200	M 12 x 1,5	3 - 4.5	6.5	16	38.4	6.5
53105210	M 16 x 1,5	4.5 - 7	7	20	43.4	7
53105220	M 20 x 1,5	7 - 10	8	24	46.4	8
53105230	M 25 x 1,5	9 - 12.5	8	29	48.9	8

Last Update (04.05.2017)


©2017 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16

SKINTOP® HYGIENIC / SKINTOP® HYGIENIC-R

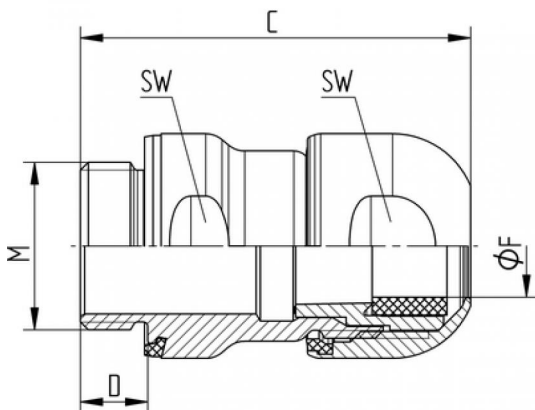

Last Update (04.05.2017)

©2017 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16