


SKINTOP® ST-HF-M

SKINTOP® halogen-free

SKINTOP® ST-HF-M, halogen-free, metric plastic cable gland, extremely flame-retardant and self-extinguishing, high functional reliability

Info

Cable entry for railway applications

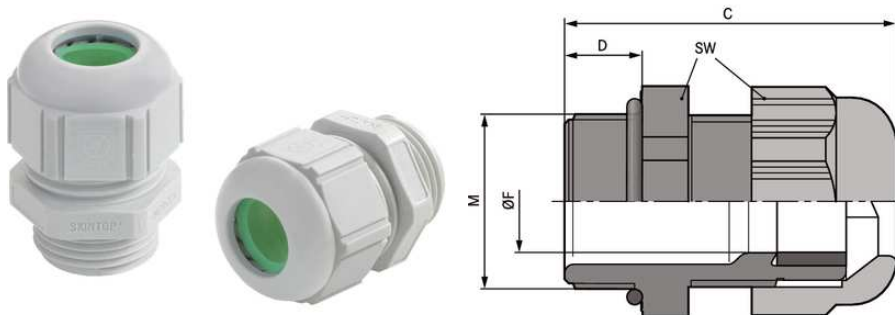

Variety of approval certifications



Halogen-free



Wide clamping range



Good chemical resistance



Rail



Flame-retardant

Benefits

High functional reliability

Extremely flame-retardant according to UL 94 V0

Completely halogen-free (including the sealing material)

Self-extinguishing, drop formation

Permanent vibration protection

Last Update (04.05.2017)

©2017 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16

SKINTOP® ST-HF-M

Application range

Underground railways and trains
When the protection of people and property is a priority.
Public buildings
Ventilation systems
Tunnel constructions

Norm references / approvals

DIN EN 45545-2: 2013
Filament testing according to EN 60695-2-1/1 +960°C

Design

Metric connection thread according to DIN EN 60423
Basis for technical information DIN IEC 62444

Technical Data

Classification:	ETIM 5.0 Class-ID: EC000441 ETIM 5.0 Class-Description: Cable gland
Caution:	Refer to T21 for the installation dimensions and tightening torques
Colour delivered:	RAL 7035 light grey
Material:	Body: Polyamide UL 94V-0 - halogen-free Sealing ring: Halogen-free polymer compound O-ring: Halogen-free polymer compound
Protection rating:	IP 68 - 5 bar
Temperature range:	static: -40°C to +100°C dynamic: -20°C to +100°C

Note

Photographs are not to scale and do not represent detailed images of the respective products.
Prices are net prices without VAT and surcharges. Sale to business customers only.

**SKINTOP® ST-HF-M**

Article number	Article designation / size	Clamping range ØF (mm)	SW mm	Total length C (mm)	Thread length, D (mm)
SKINTOP® ST-HF-M					
53111407	M 12 x 1,5	4 - 5.5	15	30	8
53111417	M 16 x 1,5	5 - 9	19	34	8
53111427	M 20 x 1,5	7 - 13	25	37	9
53111437	M 25 x 1,5	9 - 17	30	40	10
53111447	M 32 x 1,5	11 - 21	36	47	10
53111457	M 40 x 1,5	19 - 28	46	52	10
53111467	M 50 x 1,5	27 - 35	55	62	12
53111477	M 63 x 1,5	34 - 45	66	71	12

Last Update (04.05.2017)

©2017 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16