

## SKINTOP® BS-M

SKINTOP® BS-M, plastic cable gland with bending and anti-kink protection, to protect flexible cables, for moving machine parts



Variety of approval certifications



Optimum strain relief



Maximum vibration protection



Wide clamping range



Automation & fältinstallation

### Benefits

Reliable bending and anti-kink protection  
Cable protection  
Functional reliability  
To protect flexible cables

### Application range

Cables connected to electrical appliances and machinery that are moved in normal use must be protected against excessive bending in accordance with VDE 0700-1.  
Hand-held devices  
Robotics industry  
Light and sound applications  
Moving machine parts

### Norm references / approvals

UL file no. E79903

Last Update (09.05.2017)

©2017 Lapp Group - Technical changes reserved

Product Management [www.lappkabel.de](http://www.lappkabel.de)

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02\_03.16

## SKINTOP® BS-M

### Design

Metric connection thread according to DIN EN 60423  
Basis for technical information DIN IEC 62444

### Note

Refer to SKINTOP® metric accessories for suitable accessories  
Counter nut to be used: SKINTOP® GMP-GL-M  
Version with reducing insert to seal smaller cable cross-sections, SKINTOP® BSR-M is available on request  
SKINTOP® BS M ISO versions with long connection thread, see table, no DNV approval

### Technical Data

Classification:	ETIM 5.0 Class-ID: EC000441 ETIM 5.0 Class-Description: Cable gland
Caution:	Refer to T21 for the installation dimensions and tightening torques
On request:	with reducing sealing ring
Colour delivered:	RAL 7001 silver grey RAL 7035 light grey RAL 9005 black/UV-resistant
Material:	Body: Polyamide Seal: CR
Protection rating:	IP 68 - 5 bar
Temperature range:	-20°C to +100°C

### Note

Photographs are not to scale and do not represent detailed images of the respective products.  
Prices are net prices without VAT and surcharges. Sale to business customers only.

**SKINTOP® BS-M**

Article number	Article designation / size	Clamping range ØF (mm)	SW mm	Total length C (mm)	Thread length, D (mm)
<b>SKINTOP® BS-M silver grey</b>					
53111600	M 12 x 1,5	3.5 - 7	15	64	8
53111610	M 16 x 1,5	4.5 - 10	19	86	8
53111620	M 20 x 1,5	7 - 13	25	101	8
53111630	M 25 x 1,5	9 - 17	30	125	9
53111640	M 32 x 1,5	11 - 21	36	149	10
<b>SKINTOP® BS-M black</b>					
53111700	M 12 x 1,5	3.5 - 7	15	64	8
53111710	M 16 x 1,5	4.5 - 10	19	86	8
53111720	M 20 x 1,5	7 - 13	25	101	8
53111730	M 25 x 1,5	9 - 17	30	125	9
53111740	M 32 x 1,5	11 - 21	36	149	10
<b>SKINTOP® BS-M light grey</b>					
53111800	M 12 x 1,5	3.5 - 7	15	64	8
53111810	M 16 x 1,5	4.5 - 10	19	86	8
53111820	M 20 x 1,5	7 - 13	25	101	8
53111830	M 25 x 1,5	9 - 17	30	125	9
53111840	M 32 x 1,5	11 - 21	36	149	10
<b>SKINTOP® BS M ISO silver-grey (with long metric connection thread)</b>					
53017610	M 16 x 1,5 ISO	3.5 - 8	19	77.5	12
53017630	M 20 x 1,5 ISO	5 - 12	24	102	13
53017640	M 25 x 1,5 ISO	9 - 14	27	114.5	13
<b>SKINTOP® BS M ISO black (with long metric connection thread)</b>					
53017810	M 16 x 1,5 ISO	3.5 - 8	19	77.5	12
53017830	M 20 x 1,5 ISO	5 - 12	24	102	13
53017840	M 25 x 1,5 ISO	9 - 14	27	114.5	13

Last Update (09.05.2017)


©2017 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02\_03\_16

## SKINTOP® BS-M

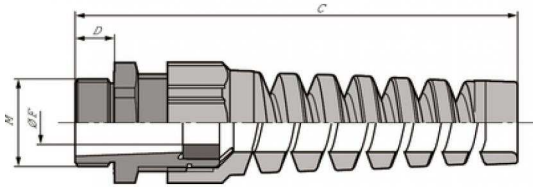

Last Update (09.05.2017)

©2017 Lapp Group - Technical changes reserved

Product Management [www.lappkabel.de](http://www.lappkabel.de)

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02\_03.16