


SKINTOP® MSR-M

SKINTOP® MSR-M, brass cable gland in areas where mechanical and chemical stability are critical, with reducing seal insert

Info

SKINTOP® MS-M 75 x 1.5 with innovative double lamella basket. Simplifies the installation of cables with a large cross-section. Now with IP69 approval! Proven to withstand demanding cleaning procedures for machinery and systems with high-pressure cleaners and hot water!

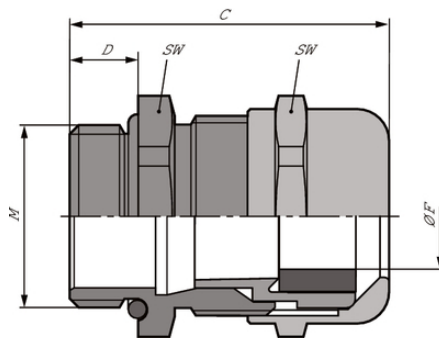

Variety of approval certifications



Temperature-resistant



Acid-resistant



Optimum strain relief



Mechanical resistance



Corrosion-resistant

Application range

With reducing seal insert, to seal cables with smaller outer diameters.

Norm references / approvals

UL file no. E79903

Last Update (02.05.2017)

©2017 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16

SKINTOP® MSR-M

Design

Metric connection thread according to DIN EN 60423

Basis for technical information DIN IEC 62444

Note

Counter nut to be used: SKINDICHT® SM-M

Refer to SKINTOP® metric accessories for suitable accessories

Technical Data

Classification:	ETIM 5.0 Class-ID: EC000441 ETIM 5.0 Class-Description: Cable gland
Caution:	Refer to T21 for the installation dimensions and tightening torques
Certifications:	IP 69 approval from size M75 x 1.5 pending. UL, CSA, DNV, VDE approval for sizes M90x2 and M110x2 pending.
Material:	Body: Nickel-plated brass Insert: Polyamide Sealing ring: CR O-ring: NBR
Protection rating:	IP 68 - 10 bar IP 69 (M12 - M63)
Temperature range:	dynamic -25°C up to +100°C static: -40°C to +100°C

Note

Photographs are not to scale and do not represent detailed images of the respective products.

Prices are net prices without VAT and surcharges. Sale to business customers only.

**SKINTOP® MSR-M**

Article number	Article designation / size	Clamping range ØF (mm)	SW mm	Total length C (mm)	Thread length, D (mm)
SKINTOP® MSR-M					
53112100	M 12 x 1,5	1 - 5	16	26.5	6.5
53112110	M 16 x 1,5	2 - 7	20	32	7
53112120	M 20 x 1,5	5 - 10	24	35.5	8
53112130	M 25 x 1,5	6 - 13	29	37.5	8
53112140	M 32 x 1,5	7 - 15	36	42.2	9
53112150	40 x 1,5	15 - 23	45	49.5	9
53112160	50 x 1,5	22 - 29	54	52	10
53112170	M 63 x 1,5	28 - 39	67	61.3	15
53112511	M 75 x 1,5	53 - 63	95	105	15
53112515	M 110 x 2	76 - 88	135	154	25

Last Update (02.05.2017)

©2017 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16