


SKINTOP® SOLAR

SKINTOP® for photovoltaics

SKINTOP® SOLAR, plastic cable gland for photovoltaics, UV- and ozone-resistant, with vibration protection and strain relief, extremely flame-retardant

Info

Cable entry for photovoltaic applications, based on EN 50262, EN 50548 and UL 1703.
Extended temperature range

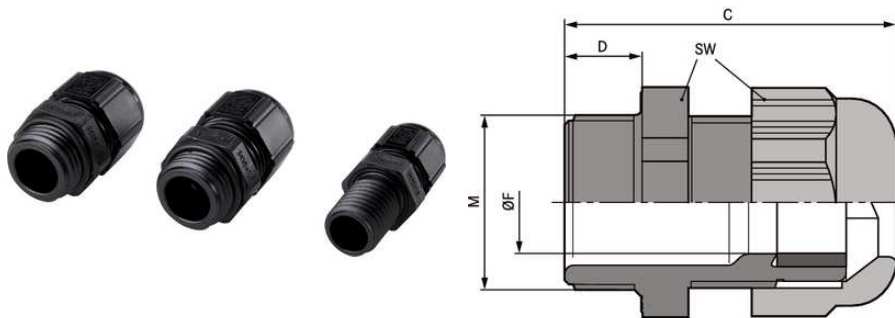

Variety of approval certifications



UV-resistant



Robust



Solar Energy



Cold-resistant

Benefits

UV- and ozone-resistant

UL 746 C - UL F1 outdoor use

High strain relief

Permanent vibration protection

Extremely flame-retardant according to UL 94V-0 / 94-5VA

Application range

Photovoltaic and solar parks

Last Update (06.05.2017)

©2017 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16

SKINTOP® SOLAR

Norm references / approvals

UL file no. E79903

Design

Metric connection thread according to DIN EN 60423

Basis for technical information DIN IEC 62444

Technical Data

Classification:	ETIM 5.0 Class-ID: EC000441 ETIM 5.0 Class-Description: Cable gland
Caution:	Refer to T21 for the installation dimensions and tightening torques
Colour delivered:	RAL 9005 black/UV-resistant
Material:	Body: Polycarbonate Seal: CR
Tests:	Cold impact test according to UL 1703/UL 746 C
Protection rating:	IP 68 - 5 bar
Temperature range:	-40°C to +100°C

Note

Photographs are not to scale and do not represent detailed images of the respective products.

Prices are net prices without VAT and surcharges. Sale to business customers only.

SKINTOP® SOLAR

Article number	Article designation / size	Clamping range ØF (mm)	SW mm	Total length C (mm)	Thread length, D (mm)
SKINTOP® SOLAR					
53113300	M 12 x 1,5	3.5 - 7	15	36	15
53113310	M 16 x 1,5	7 - 9	19	34	8

Last Update (06.05.2017)

©2017 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16