


SKINTOP® COLD

SKINTOP® COLD, metric brass cable gland, high cold resistance and cold impact resistance, high mechanical stability

Info

For extreme sub-zero temperatures

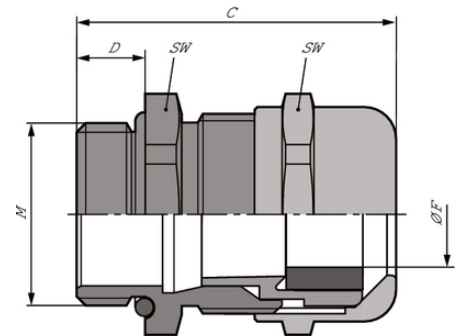

Temperature-resistant



Mechanical resistance



Corrosion-resistant



Good chemical resistance



Cold-resistant

Benefits

High resistance to cold

Cold impact resistance

High mechanical stability

Optimum strain relief

Wide, variable clamping ranges

Application range

In areas where mechanical stability and high cold resistance are critical.

Air-conditioning technology

Refrigerated goods plants, cold storage

Offshore sector

Plant construction

Last Update (09.05.2017)

©2017 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16

SKINTOP® COLD

Design

Metric connection thread according to DIN EN 60423

Basis for technical information DIN IEC 62444

Note

Counter nut to be used: SKINDICHT® SM-M

Refer to SKINTOP® metric accessories for suitable accessories

Technical Data

Classification:	ETIM 5.0 Class-ID: EC000441 ETIM 5.0 Class-Description: Cable gland
Caution:	Refer to T21 for the installation dimensions and tightening torques
Material:	Body: Nickel-plated brass Insert: Special polyamide Sealing ring: Silicone O-ring: Silicone
Protection rating:	IP 68 - 10 bar (M12 - M20) IP 68 - 5 bar (M25 - M63)
Temperature range:	-70°C to +100°C

Note

Photographs are not to scale and do not represent detailed images of the respective products.

Prices are net prices without VAT and surcharges. Sale to business customers only.

**SKINTOP® COLD**

Article number	Article designation / size	Clamping range ØF (mm)	SW mm	Total length C (mm)	Thread length, D (mm)
SKINTOP® COLD					
53113500	M 12 x 1,5	3 - 7	16	26.5	6.5
53113510	M 16 x 1,5	4.5 - 10	20	32	7
53113520	M 20 x 1,5	7 - 13	24	35.5	8
53113530	M 25 x 1,5	9 - 17	29	37.5	8
53113540	M 32 x 1,5	11 - 21	36	42.2	9
53113550	M 40 x 1,5	19 - 28	45	49.5	9
53113560	M 50 x 1,5	27 - 35	54	52	10
53113570	M 63 x 1,5	34 - 45	67	61.3	15

Last Update (09.05.2017)

©2017 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16