










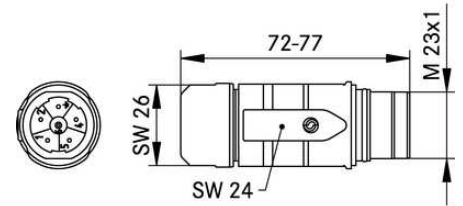

EPIC® POWER LS1 F6

Circular connector for servo drives and power supply.

EPIC® coupler 8-pin for male contacts for cable extensions



-  Variety of approval certifications
-  Waterproof
-  Interference signals
-  Integrated SKINTOP[®] cable gland
-  Robust
-  Space requirement
-  Optimum strain relief
-  Assembly time
-  Mechanical resistance
-  Maximum vibration protection

Last Update (03.05.2017)

©2017 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16

EPIC® POWER LS1 F6



Corrosion-resistant



Good chemical resistance



Wind Energy



Industrial machinery and plant engineering

Benefits

High power in the smallest installation space, optimal solution for electric motors

EMC-optimised design

Safe use in field thanks to high protection rating

Application range

Plant construction

Servo drives and servo assemblies

Technical Data

Classification:	ETIM 5.0 Class-ID: EC002635 ETIM 5.0 Class-Description: Circular connector (industrial connector)
Rated voltage (V):	630 V (2mm contacts) 250 V (1 mm contacts)
Rated impulse voltage:	6 kV (2 mm contacts) 4 kV (1 mm contacts)
Rated current in A:	26A/3+PE+4, 25A/5+PE (2mm contacts) 7 A (1 mm contacts)
Pollution degree:	3
Contact resistance:	< 4 mOhm
Contacts:	Gold-plated brass
Number of contacts:	3+PE+4(2mm/1mm) 5+PE(2mm)
Cable connection:	Crimp termination: 0.5 – 4.0 mm ² (2mm contacts) Crimp termination: 0.14 – 1.0 mm ² (1mm contacts)
Material:	Housing: Nickel-plated zinc die-cast, nickel-plated brass Insulating body: PA Seal: FPM
Protection rating:	IP68 (10h/1m)
Plug cycles:	500
VDE-tested:	Certified production control: VDE reg. no. B25
Temperature range:	-25°C to +125°C

Last Update (03.05.2017)

©2017 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16

EPIC® POWER LS1 F6**Note**

Photographs are not to scale and do not represent detailed images of the respective products.
Prices are net prices without VAT and surcharges. Sale to business customers only.

**EPIC® POWER LS1 F6**

Article number	Article description	Contacts included	Clamping range in mm	Pin configuration
Type LS1 F6, coupling connector, 6-pin, for male contacts				
73000012	LS1 F6	6	8.5 - 11	5+PE
73000014	LS1 F6	8.5 - 11	5+PE	
73000013	LS1 F6	6	10.5 - 15.5	5+PE
73000015	LS1 F6	10.5 - 15.5	5+PE	
76133000	LS1 F6	6	7.5 - 15.5	5+PE
76133510	LS1 F6	7.5 - 15.5	5+PE	
44420095	LS1 F6 with 2mm contact for 4mm ² connection	6	14 - 17	5+PE
44420094	LS1 F6	14 - 17	5+PE	
Type LS1 F6, coupling connector, 8-pin, for male contacts				
73000008	LS1 F6	8	8.5 - 11	3+PE+4
73000010	LS1 F6	8.5 - 11	3+PE+4	
73000009	LS1 F6	8	10.5 - 15.5	3+PE+4
73000011	LS1 F6	10.5 - 15.5	3+PE+4	
76134000	LS1 F6	8	7.5 - 15.5	3+PE+4
76134510	LS1 F6	7.5 - 15.5	3+PE+4	
44420093	LS1 F6 with 2mm contact for 4mm ² connection	8	14 - 17	3+PE+4
44420092	LS1 F6	14 - 17	3+PE+4	

Last Update (03.05.2017)

©2017 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.
PN 0456 / 02_03_16