




## GAN-DADE7A-FS0200C1-XC607-AD

Industrial Connectors:OpenConnector GDM:GAN

Delivery informations	
Availability	available
Document created at	04.11.2008
Product description	
Description	Cable socket with integrally molded lead (2 m), gasket (captive) and central screw M3 (stainless steel, Phillips cross-head)
Type	GAN-DADE7A-FS0200C1-XC607-AD
Order No.	934 562-010
Other standard types	cable length 5 m: order no. 934 562-012
Number of contacts	2 + PE
Cable material	PUR
Cable color	grey
Cable length	2 m
Cable diameter	5.8 mm
Conductor size	0.75 mm
Cable specification	Li9Y11Y-HF 3G x 0.75 mm <sup>2</sup>
Cable type	fire resist. IEC 60332-1, DIN VDE 0472 Part 804 type B
Standard	DIN EN 175 301-803-A
Housing Color	black
Construction type	A
Description of Wiring	
Voltage rectifier	-
Suppressor	-
Other characteristics	-
Drawing	

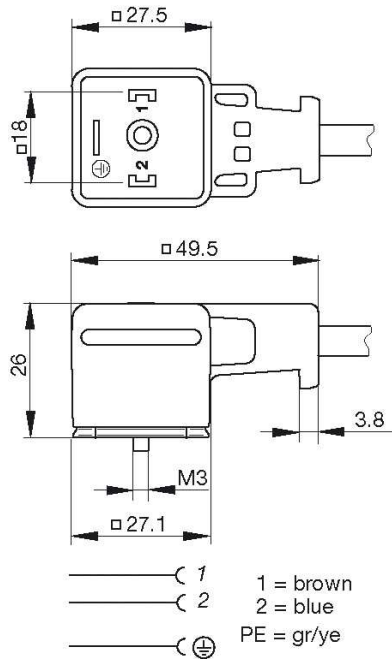

<b>Technical data</b>	
Contact dimensions	6.3 mm x 0.8 mm, 4.8 mm x 0.8 mm
Wire stranding	42 x 0.15
Rated voltage	AC/DC 250 V
Rated current	10 A
Contact resistance	<= 10 mOhm
Mounting	central nut M3
<b>Material</b>	
Contact surface material	Cu/Sn
Contact bearer material	PA 66
Housing material	PUR
<b>Environmental conditions</b>	
Protection class (IEC 60529)	IP 65, IP 67
Pollution severity	3
Temperature range	-25 °C to +80 °C, notice derating
<b>Inflammability class</b>	
Housing	94 HB
Cable	fire resist. IEC 60332-1
Contact bearer	94 V0
<b>Approvals</b>	
UL	UL pending
VDE	VDE
<b>Packing unit</b>	
Packaging unit	50 pieces