


KB

Cable ties and pliers

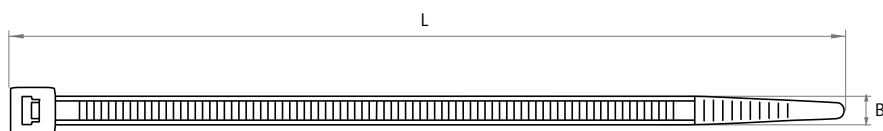

Type	Order No.	Length L	Width B	Bundling range	Tensile strength	PU
KB 28	■ 61225	178 mm	9 mm	28 mm	350 N	100
KB 15	□ 61115	75 mm	2.2 mm	15 mm	60 N	100
KB 20	□ 61120	98 mm	2.5 mm	20 mm	60 N	100
KB 22	□ 61125	135 mm	2.6 mm	22 mm	80 N	100
KB 25	□ 61130	140 mm	3.6 mm	25 mm	130 N	100
KB 30	□ 61135	160 mm	4.5 mm	30 mm	180 N	100
KB 45	□ 61140	178 mm	4.8 mm	45 mm	220 N	100
KB 50	□ 61145	200 mm	2.6 mm	50 mm	80 N	100
KB 55	□ 61150	200 mm	4.8 mm	50 mm	220 N	100
KB 75	□ 61155	290 mm	4.8 mm	75 mm	220 N	100
KB 100	□ 61160	360 mm	4.8 mm	100 mm	220 N	100
KB 20	■ 61215	98 mm	2.5 mm	20 mm	60 N	100
KB 25	■ 61220	140 mm	3.6 mm	25 mm	130 N	100
KB 30	■ 61230	160 mm	4.5 mm	30 mm	180 N	100
KB 45	■ 61235	178 mm	4.8 mm	45 mm	220 N	100
KB 55	■ 61240	200 mm	4.8 mm	50 mm	220 N	100
KB 75	■ 61245	290 mm	4.8 mm	75 mm	220 N	100
KB 100	■ 61250	360 mm	4.8 mm	100 mm	220 N	100
KBW 9	61300	Processing tool for cable ties				1

Product description

Cable ties are proven utilities for economical bundling and fixing of cables, looms, tubes, conduits and many other components, e.g. for achieving strain relief.

Power cable ties KB 28 for special requirements. Bundling range max. 28 mm.

Order No. 61225

■ Specifications KB 28

Material Polyamide 12 (PA), black
 Flame class UL94-V2
 Temperature - 40°C to + 100°C
 Properties Oil- and mould-resistant

□ Specifications KB natural

Material Polyamide 6.6 (PA), natural
 Flame class UL94-V2
 Temperature - 40°C to + 100°C
 Properties Oil- and mould-resistant

■ Specifications KB black

Material Polyamide 6.6 (PA), black
 Flame class UL94-V2
 Temperature - 40°C to + 100°C
 Properties UV-resistant, particularly matching for outdoor use