


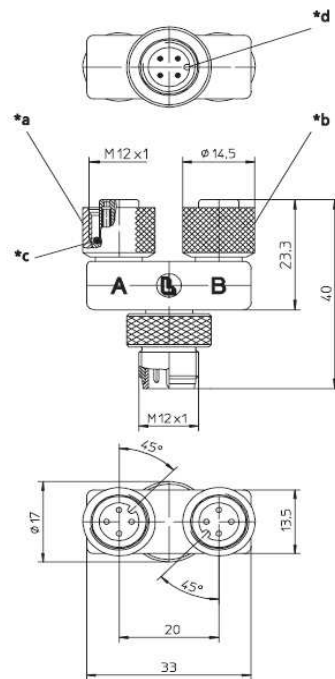


**Product information**  
**ASBS 2 M12-4S-90**  
**11119**

Name	ASBS 2 M12-4S-90
	
	T-connector, M12 male connector with two M12 female connectors, 4 poles, 90°-version, with self locking threaded
<b>Delivery informations</b>	
Availability	available
<b>Product description</b>	
Type	ASBS 2 M12-4S-90
Order No.	11119
Description	T-connector, M12 male connector with two M12 female connectors, 4 poles, 90°-version, with self locking threaded
Number of contacts	4
Color of housing	orange
Product characteristics	Vibration resistance, Oil resistance
<b>Classification</b>	
Belden brand	Lumberg-Automation
<b>Environmental conditions</b>	
Environmental temperature	-25 °C ... 90 °C
Degree of protection (IP), mounted	IP67
Pollution degree	3
<b>Materials</b>	
Housing material / Molded body	TPU, self-extinguishing
Contact bearer material	TPU, self-extinguishing
Contact material	CuZn
Contact material - Surface refinement	pre-nickeled and 0.8 microns gold-plated
Knurled screw / nut material	CuZn, nickel-plated
Sealing material	FKM
<b>Electrical data</b>	
Contact resistance	≤ 5 mΩ
Rated current In	2 A per outlet / 4 A max. at 40 °C
Nominal voltage	240 V
Rated voltage	250 V
Test voltage	2.0 kV eff./60 s
Insulation resistance	> 1 GΩ



Picture  
Drawing



- \*a Mutter schwarz  
coupling nut black
- \*b Mutter vernickelt  
coupling nut nickel-plated
- \*c O-Ring  
O-ring
- \*d Kodierung 90°  
coding 90°