




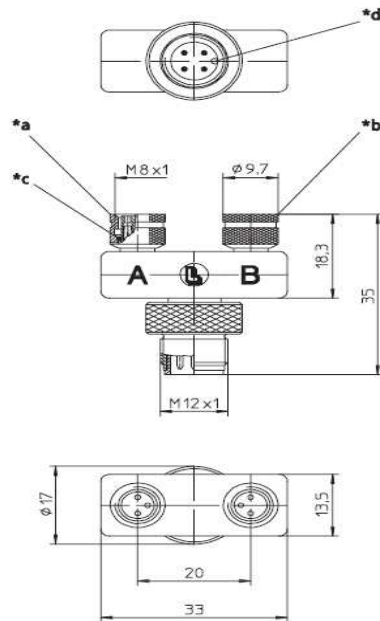
Product information
ASBS 2 M8-90
11125

Name	
ASBS 2 M8-90	
	
T-connector, M12 male connector with two M8 female connectors, 3 poles, 90°-version, with self locking threaded	
Delivery informations	
Availability	available
Product description	
Type	ASBS 2 M8-90
Order No.	11125
Description	T-connector, M12 male connector with two M8 female connectors, 3 poles, 90°-version, with self locking threaded
Number of contacts	3
Color of housing	orange
Product characteristics	Vibration resistance, Oil resistance
Classification	
Belden brand	Lumberg-Automation
Environmental conditions	
Environmental temperature	-25 °C ... 90 °C
Degree of protection (IP), mounted	IP67
Pollution degree	3
Materials	
Housing material / Molded body	TPU, self-extinguishing
Contact bearer material	TPU, self-extinguishing
Contact material	CuZn
Contact material - Surface refinement	pre-nickel and 0.8 microns gold-plated
Knurled screw / nut material	CuZn, nickel-plated
Sealing material	FKM
Electrical data	
Contact resistance	≤ 5 mΩ
Rated current In	2 A per outlet / 4 A max. at 40 °C
Nominal voltage	60 V
Rated voltage	63 V
Test voltage	1.0 kV eff./60 s
Insulation resistance	> 1 GΩ

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Picture
Drawing



- *a Mutter schwarz
coupling nut black
- *b Mutter vernickelt
coupling nut nickel-plated
- *c O-Ring
O-ring
- *d Kodierung 90°
coding 90°