



Product information RS - RS 50-04/5 M 11575


lame	RS
	Actuator/sensor cordset, 7/8" male connector, straight version, with self-locking threaded joint and molded cable, PVC cable, orange, 5 poles, 5 meters.
Delivery informations	
Availability	available
Product description	
уре при	RS 50-04/5 M
Order No.	11575
Description	Actuator/sensor cordset, 7/8" male connector, straight version, with self-locking threaded joint and molded cable, PVC cable, orange, 5 poles, 5 meters.
lumber of contacts	5
Color of housing	orange
Product characteristics	Vibration resistance, Oil resistance
Mechanical data	
ype of plug-in contact	Male connector
Design of housing	straight
Thread	7/8"
Design of electrical connection	connector 7/8 inch
ED display present	×
Invironmental conditions	
invironmental temperature	-40 °C 90 °C
Degree of protection (IP), mounted	IP68
Pollution degree	3
Materials	
lousing material / Molded body	TPU, self-extinguishing
Contact bearer material	TPU, self-extinguishing
Contact material	CuZn
Contact material - Surface refinement	silver-plated and 0.3 microns gold-plated
(nurled screw / nut material	PA
Electrical data	10
Contact resistance	≤ 5 mΩ
Rated current In	9 A at 40°C, UL and notice derating
lominal voltage	240 V
Rated voltage	250 V
est voltage	
est voltage nsulation resistance	1.5 kV eff./60 s
	>1 GΩ
Approvals	DALIC 2002/05/EC
RoHS 2002/95/EG compliant	RoHS 2002/95/EG
Cable Consth	5 m
Cable length	
Cable description	Cable for sensors and actuators
Color of jacket	orange
Material of outer jacket	PVC
Outer diameter of the cable	6.80 mm
lominal diameter of the cable	5 x 0.50 mm ²

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Picture

Drawing

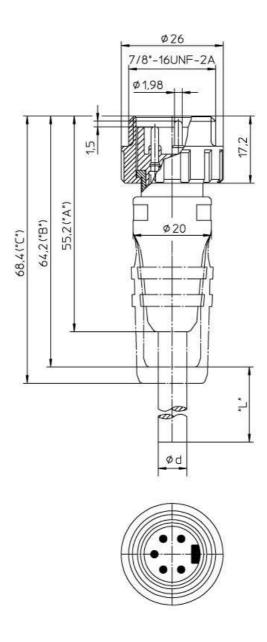

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.