


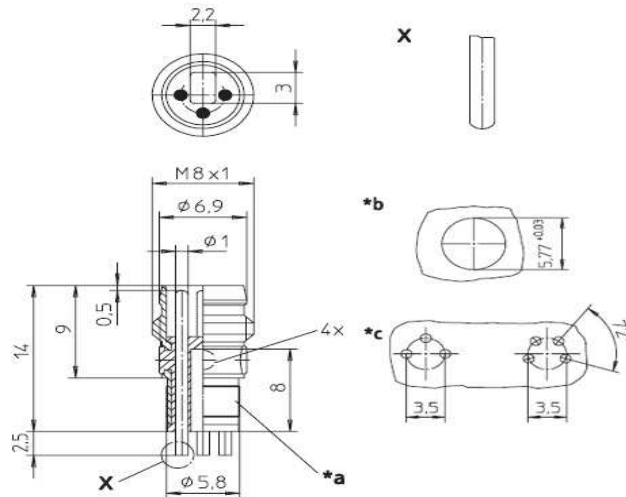


Product information
RSMEB 3
11655


Name	
RSMEB 3	
	
	Receptacle connector, M8 male connector for sensors with combined snap-in/threaded joint, 4 light indicator windows, mounting hole for LED, short solder contacts, solid contacts on solder side, 3 poles
Delivery informations	
Availability	available
Product description	
Type	RSMEB 3
Order No.	11655
Description	Receptacle connector, M8 male connector for sensors with combined snap-in/threaded joint, 4 light indicator windows, mounting hole for LED, short solder contacts, solid contacts on solder side, 3 poles
Note	The application of these products in harsh environments should always be checked before use.
Number of contacts	3
Color of housing	chromium
Product characteristics	Oil resistance
Classification	
Belden brand	Lumberg-Automation
Mechanical data	
Type of plug-in contact	Male connector
Design of housing	straight
Thread	M8
Design of electrical connection	solder connection
Connectable conductor cross-section multiple wire (without sleeve)	max. 0.25 mm ²
LED display present	✗
Environmental conditions	
Environmental temperature	-25 °C ... 80 °C
Pollution degree	3
Materials	
Housing material / Molded body	CuZn, nickel-plated
Contact bearer material	PA
Contact material	CuZn
Contact material - Surface refinement	pre-nickeled and 0.8 microns gold-plated
Electrical data	
Contact resistance	≤ 5 mΩ
Rated current I _n	4 A at 40°C
Nominal voltage	60 V
Rated voltage	63 V
Test voltage	1.5 kV eff./60 s
Insulation resistance	> 1 GΩ
Approvals	
Approvals	UL



Picture
Drawing



3-polig
3 poles



- *X massiv
solid
- *b Einbauöffnung
cut out
- *c Lochbild in der Leiterplatte
hole pattern in printed circuit board