




**Product information**  
**RST 5-VAD 3C-4-2-228 -**  
**RST 5-VAD 3C-4-2-228/1 M**  
**12075**

Name	
Name	RST 5-VAD 3C-4-2-228
	
	Sensor cordset, double-ended, M12 male connector with self-locking threaded joint and connector for pressure switches according to DIN EN 175301-803, form A, 5 poles, LED yellow and function indicator green, PUR jacket, halogen free, black, 1 meters.
Delivery informations	
Availability	available
Product description	
Type	RST 5-VAD 3C-4-2-228/1 M
Order No.	12075
Description	Sensor cordset, double-ended, M12 male connector with self-locking threaded joint and connector for pressure switches according to DIN EN 175301-803, form A, 5 poles, LED yellow and function indicator green, PUR jacket, halogen free, black, 1 meters.
Note	The application of these products in harsh environments should always be checked before use.
Number of contacts	5
Color of housing	black
Color of Housing, side 2	black translucent
Product characteristics	Oil resistance, Drag chains
Classification	
Belden brand	Lumberg-Automation
Mechanical data	
Type of plug-in contact	Male connector
Type of plug-in contact, side 2	Male connector
Design of housing	straight
Design of housing, side 2	connector for pressure switches, A
Thread	M12
Thread, side 2	other
Design of electrical connection	screw connection
Design of electrical connection, side 2	valve plug
Coding of the M12 round plug connector	A
LED display present	✔
Environmental conditions	
Environmental temperature	-25 °C ... 80 °C
Degree of protection (IP), mounted	IP67
Pollution degree	3
Materials	
Housing material / Molded body	TPU
Housing material / Molded body, side 2	TPU
Contact bearer material	TPU
Contact bearer material, side 2	PBT
Contact material	CuZn (M12)
Contact material - Surface refinement	pre-nickeled and 0.3 microns gold-plated
Contact material, side 2	CuZn
Contact material - Surface refinement, side 2	pre-nickeled and tin-plated
Knurled screw / nut material	CuZn, nickel-plated
Electrical data	
Rated current In	4 A at 40°C


The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Nominal voltage	24 V
Rated voltage	32 V
Test voltage	1.5 kV eff./60 s
Insulation resistance	> 1 GΩ
<b>Approvals</b>	
Approvals	UL
<b>Cable</b>	
Cable length	1 m
Cable number	228
Cable description	Cable for sensors and actuators
Color of jacket	black
Material of outer jacket	PUR
Without halogens as in EN 50267-2-3	✓
shielded	✗
welding spark proof	✗
Outer diameter of the cable	5 mm
Number of conductors	3
Cable design	3 x 0.50 mm <sup>2</sup>
Conductor design	16 x 0.20 mm
Flame resistant according to standard	yes

**Picture**

**Drawing**

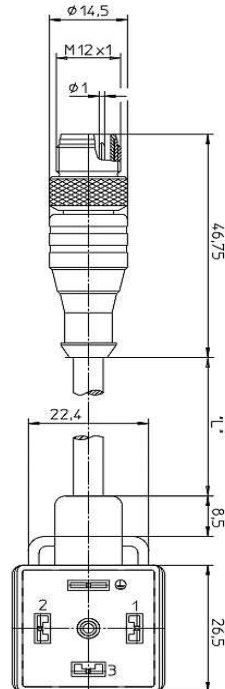

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.