




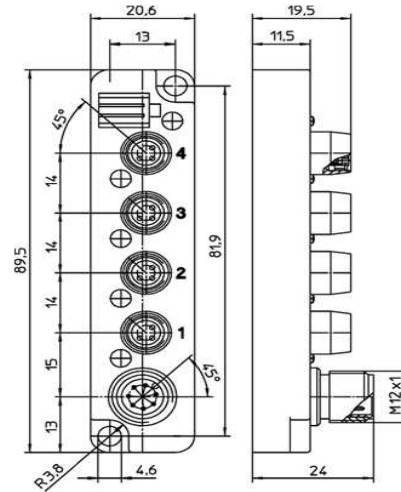
Product information
SBS 4/LED 3
12124

Name	
SBS 4/LED 3	
	
Pluggable miniature sensor distribution box, 4-port version, with LED operation and function indicators, M8 socket, 3 poles, 1 signal per socket, M12 connection for control cable (type RK(W)T 8-6-337/... M).	
Delivery informations	
Availability	available
Product description	
Type	SBS 4/LED 3
Order No.	12124
Description	Pluggable miniature sensor distribution box, 4-port version, with LED operation and function indicators, M8 socket, 3 poles, 1 signal per socket, M12 connection for control cable (type RK(W)T 8-6-337/... M).
Number of contacts	3 (M8)
Version	4 ports
Color of housing	orange
Product characteristics	Vibration resistance, Oil resistance
Classification	
Belden brand	Lumberg-Automation
Mechanical data	
Thread	M8
LED display present	✓
Environmental conditions	
Environmental temperature	-15 °C ... 90 °C
Degree of protection (IP), mounted	IP67
Pollution degree	3
Materials	
Housing material / Molded body	TPU, self-extinguishing
Contact bearer material	TPU (M8)
Contact material	CuZn
Contact material - Surface refinement	pre-nickel and 0.8 microns gold-plated
Contact bearer material, side 2	PA (M12)
Knurled screw / nut material	CuZn, nickel-plated
Sealing material	FKM
Electrical data	
Contact resistance	≤ 5 mΩ
Rated current In	2 A per socket / 2 A max. at 40 °C
Nominal voltage	10 - 30 V DC
Insulation resistance	> 1 GΩ
Scope of delivery and accessories	
Scope of delivery	2 dust covers for unused sockets 1 attachable label

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Picture
Drawing



The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.