


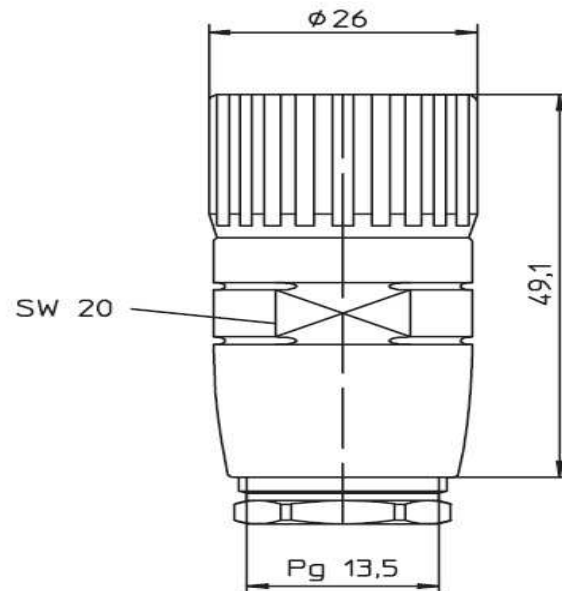


**Product information**  
**RKC.../13,5 - RKC 190/13,5**  
**2135**


Name		RKC.../13,5
		
		Field Attachable Connector, M23 female connector with threaded joint, assembling with solder connections, Screw joint for cable PG 13,5; 19-poles.
Delivery informations		
Availability		available
Product description		
Type		RKC 190/13,5
Order No.		2135
Description		Field Attachable Connector, M23 female connector with threaded joint, assembling with solder connections, Screw joint for cable PG 13,5; 19-poles.
Number of contacts		19
Product characteristics		Vibration resistance, Oil resistance, Drag chains suitable, EMC resistance, UV resistance
Mechanical data		
Type of plug-in contact		Female connector
Thread		M23
Design of electrical connection		connector M23
LED display present		✗
Environmental conditions		
Environmental temperature		-40 °C ... 125 °C
Degree of protection (IP), mounted		IP67
Pollution degree		3
Materials		
Housing material / Molded body		CuZn, nickel-plated
Contact bearer material		PBT
Contact material		CuZn
Contact material - Surface refinement		pre-nickeled and gold-plated
Knurled screw / nut material		CuZn, nickel-plated
Electrical data		
Rated current In		7.5 A (7.5 A - pin-Ø 1.0 mm; 10 A - pin-Ø 1.5 mm)
Nominal voltage		120 V
Rated voltage		125 V
Insulation resistance		> 10 GΩ
Approvals		
RoHS 2002/95/EG compliant		RoHS 2002/95/EG
Cable		
Diameter of conductor		0.2 mm



Picture  
Drawing



**12-polig**  
**12 poles**



**19-polig**  
**19 poles**

