




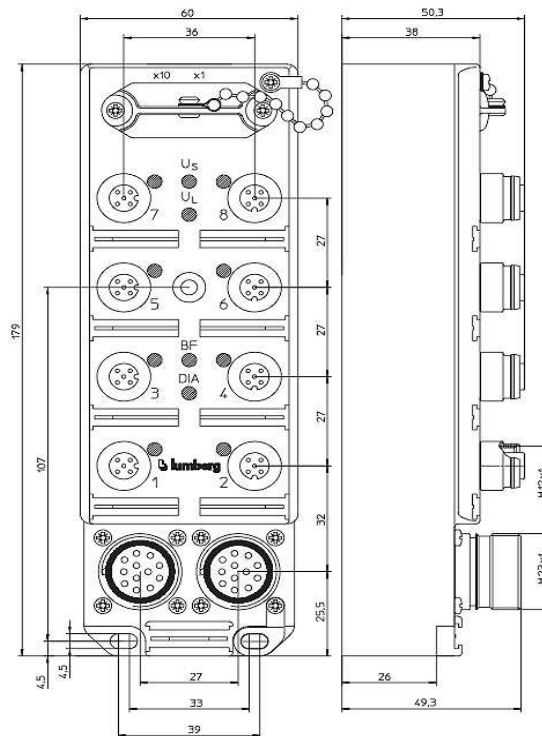
**Product information**  
**0970 PSL 213**  
**28962**

<b>Name</b>	
0970 PSL 213	
	
Profibus-DP device with 8 digital inputs to connect standard sensors, combined FIXCON/M12 socket, rotary switches for addressing, M23 bus connection.	
<b>Delivery informations</b>	
<b>Availability</b>	available
<b>Product description</b>	
<b>Type</b>	0970 PSL 213
<b>Order No.</b>	28962
<b>Description</b>	Profibus-DP device with 8 digital inputs to connect standard sensors, combined FIXCON/M12 socket, rotary switches for addressing, M23 bus connection.
<b>Note</b>	The application of these products in harsh environments should always be checked before use.
<b>Color of housing</b>	orange
<b>Product characteristics</b>	Oil resistance, EMV resistance, Vibration resistance
<b>Classification</b>	
<b>Belden class</b>	I/O Modules with Digital Inputs (DI)
<b>Belden brand</b>	Lumberg-Automation
<b>Mechanical data</b>	
<b>Weight</b>	545 g
<b>Dimensions (W x H x D)</b>	60 mm x 179 mm x 50.3 mm
<b>Environmental conditions</b>	
<b>Environmental temperature</b>	0 °C ... 60 °C
<b>Degree of protection (IP), mounted</b>	IP67
<b>Materials</b>	
<b>Housing material / Molded body</b>	PUR
<b>Bus system</b>	
<b>Fieldbus system</b>	Profibus DP
<b>Bus Connection</b>	M23
<b>Device Identification</b>	044F hex
<b>Transmission rate</b>	12 MBd
<b>Address range</b>	1 dec. ... 126 dec.
<b>Rotary address switches</b>	1 dec. ... 99 dec.
<b>Default address</b>	99 dec.
<b>System power supply</b>	
<b>System power supply</b>	$U_L$
<b>Nominal voltage (System power supply)</b>	24 V DC
<b>Voltage range DC (System power supply)</b>	19 V ... 30 V
<b>Power consumption (System power supply)</b>	60 mA
<b>Reverse polarity protection (System power supply)</b>	Yes
<b>Operating Indication (System power supply)</b>	LED green
<b>Sensors power supply</b>	
<b>Sensors power supply</b>	$U_S$
<b>Voltage range (Sensor power supply)</b>	min. ( $U_L - 1.5V$ )
<b>Sensor current (at TU30°C) (Sensor power supply)</b>	800 mA
<b>Short-circuit proof (Sensor power supply)</b>	Yes
<b>Indication (Sensor power supply)</b>	LED green
<b>Inputs</b>	
<b>Input wiring</b>	Type 3 acc. to IEC 61131-2

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Signal type (Inputs)	Digital Inputs
Number of channels (Inputs)	8
Channel type (Inputs)	N.O., p-switching
Nominal input voltage	24 V DC
Voltage (Signal status "1") - Explanation	11 - 30 V
Voltage (Signal status "0") - Explanation	-3 - 5 V
Channel status indicator (Inputs)	LED yellow per channel
Input current at 24 V DC (typ.)	6 mA
<b>Scope of delivery and accessories</b>	
Scope of delivery	Dust covers M12 - 2 pieces, Attachable labels - 10 pieces
<b>Picture</b>	
Drawing	



The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.