




**Product information**

**0915 034 101 - 0915 034 101/3 M  
29717**

Name		0915 034 101
		
		AS-Interface cordset, doubleended, M12 male connector and M12 female connector with self-locking threaded joint, 3 meter, PUR jacket, halogen free, orange.
<b>Delivery informations</b>		
Availability	available	
<b>Product description</b>		
Type	0915 034 101/3 M	
Order No.	29717	
Description	AS-Interface cordset, doubleended, M12 male connector and M12 female connector with self-locking threaded joint, 3 meter, PUR jacket, halogen free, orange.	
Note	The application of these products in harsh environments should always be checked before use.	
Color of housing	orange	
Product characteristics	Oil resistance, Vibration resistance	
<b>Classification</b>		
Belden class	Connecting Cordsets	
Belden brand	Lumberg-Automation	
<b>Environmental conditions</b>		
Environmental temperature	-25 °C ... 80 °C	
Degree of protection (IP), mounted	IP67	
Pollution degree	3	
<b>Materials</b>		
Housing material / Molded body	TPU, self-extinguishing	
Contact bearer material	TPU, self-extinguishing	
Contact material	CuZn	
Contact material - Surface refinement	pre-nickeled and 0.8 microns gold-plated	
Contact material, side 2	CuZn	
Contact material - Surface refinement, side 2	pre-nickeled and 0.3 microns gold-plated	
Knurled screw / nut material	CuZn, nickel-plated	
Sealing material	FKM (Female)	
<b>Electrical data</b>		
Nominal voltage	240 V	
Rated voltage	250 V	
Test voltage	2.0 kV eff./60 s	
Insulation resistance	> 1 GΩ	
Nominal current at 40°C	4 A	
<b>Cable</b>		
Cable length	3 m	
Cable number	34	
Cable description	Control cable	
Color of jacket	orange	
Material of outer jacket	PUR	
Without halogens as in EN 50267-2-3	✓	
shielded	✗	
welding spark proof	✗	
Outer diameter of the cable	5.5 mm	
Number of conductors	4	


The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Cable design	4 x 0.50 mm <sup>2</sup>
Conductor design	16 x $\emptyset$ 0.2 mm
Flame resistant according to standard	acc. IEC 60332-1-2

[Picture](#)

[Drawing](#)

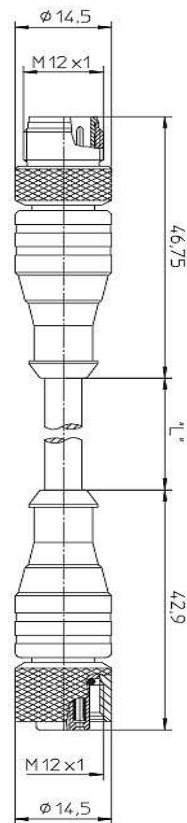

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.