




Product information
RST-RKM - RST 3-RKM 3-224/0,6 M
43708


Name		RST-RKM
		
		Cordset, double ended, for sensors and actuators, M12 male connector with self-locking threaded joint, straight, 3-poles, M8 female connector with snap-in joint, straight, 3-poles, PUR jacket, halogen free, black, 0.6 meters.
Delivery informations		
Availability	available	
Product description		
Type	RST 3-RKM 3-224/0,6 M	
Order No.	43708	
Description	Cordset, double ended, for sensors and actuators, M12 male connector with self-locking threaded joint, straight, 3-poles, M8 female connector with snap-in joint, straight, 3-poles, PUR jacket, halogen free, black, 0.6 meters.	
Note	The application of these products in harsh environments should always be checked before use.	
Number of contacts	3	
Color of housing	black translucent	
Color of Housing, side 2	black translucent	
Product characteristics	Vibration resistance, Drag chains, Oil resistance	
Classification		
Belden brand	Lumberg-Automation	
Mechanical data		
Type of plug-in contact	Male connector	
Type of plug-in contact, side 2	Female connector	
Design of housing	straight	
Design of housing, side 2	straight	
Thread	M12	
Thread, side 2	M8	
Design of electrical connection	connector M12	
Design of electrical connection, side 2	connector M8	
Coding of the M12 round plug connector	A	
LED display present	✘	
Environmental conditions		
Environmental temperature	-25 °C ... 80 °C	
Degree of protection (IP), mounted	IP65	
Pollution degree	3	
Materials		
Housing material / Molded body	TPU	
Housing material / Molded body, side 2	TPU	
Contact bearer material	TPU	
Contact bearer material, side 2	PA/TPU	
Contact material	CuZn	
Contact material - Surface refinement	pre-nickeled and 0.3 microns gold-plated	
Contact material, side 2	CuZn	
Contact material - Surface refinement, side 2	pre-nickeled and 0.3 microns gold-plated	
Electrical data		
Rated current In	4 A at 40°C	
Nominal voltage	60 V	
Rated voltage	63 V	

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Test voltage		1.5 kV eff./60 s
Insulation resistance		> 1 GΩ
Approvals		
Approvals		UL
RoHS 2002/95/EG compliant		yes
Cable		
Cable length		0.6 m
Cable number		224
Cable description		Cable for sensors and actuators
Color of jacket		black
Material of outer jacket		PUR
Without halogens as in EN 50267-2-3		✓
shielded		✗
welding spark proof		✗
Outer diameter of the cable		4.3 mm
Number of conductors		3
Cable design		3 x 0.34 mm ²
Conductor design		43 x 0.10 mm
Flame resistant according to standard		yes

Picture
Drawing

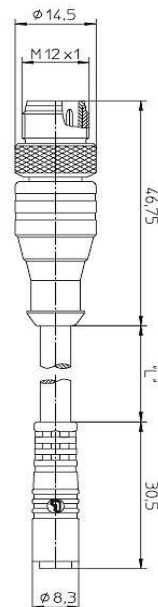

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.