

## Iumbergautomation A BELDEN BRAND

**Product information** 8 ports, 1 signal/socket (3+PE), 5-15 M - ASNBL 8/LED5-4-320/5 M 58453

Name

## 8 ports, 1 signal/socket (3+PE), 5-15 M




Actuator/sensor distribution box, 8-port version, with LED operation and function indicators, housing and receptacle shells in stainless steel, with lateral ports, M12 socket, 4-pole, 1 signal per socket, fixed control cable - especially designed for use in food processing equipment, 5 meter.

	minz societ, 4 pole, 1 signal per societ, incer control cable - copedany designed for use in food processing equipment, 5 meter.
Delivery informations	
Availability	available
Product description	
Туре	ASNBL 8/LED 5-4-320/5 M
Order No.	58453
Description	Actuator/sensor distribution box, 8-port version, with LED operation and function indicators, housing and receptacle shells in stainless steel, with lateral ports,
	M12 socket, 4-pole, 1 signal per socket, fixed control cable - especially designed for use in food processing equipment, 5 meter.
Number of contacts	4 (M12)
Version	8 ports
Color of housing	metallic
Product characteristics	Vibration resistance, Acids resistance, Drag chains suitable, EMC resistance
Classification	
Belden brand	Lumberg-Automation
Mechanical data	
Thread	M12
LED display present	✓
Environmental conditions	
Environmental temperature	-25 °C 70 °C
Degree of protection (IP), mounted	IP67 / IP69K
Pollution degree	3
Materials	
Housing material / Molded body	stainless steel
Contact bearer material	PVC
Contact material	CuZn
Contact material - Surface refinement	pre-nickeled and 0.8 microns gold-plated
Knurled screw / nut material	stainless steel
Sealing material	EPDM
Electrical data	
Contact resistance	≤5 mΩ
Rated current In	4 A per socket / 12 A max. at 40°C
Nominal voltage	10 - 30 V DC
Rated voltage	32 V
Insulation resistance	>1 6Ω
Approvals	
Approvals	UL
Cable	
Cable length	5 m
Cable number	320
Cable description	Cable for actuator/sensor distribution boxes
Color of jacket	
	black

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Outer diameter of the cable	9.5 mm
Number of conductors	11
Cable design	$8 \times 0.34 \text{ mm}^2 + 3 \times 0.75 \text{ mm}^2$
Flame resistant according to standard	IEC 60332-1-2, UL WV-1, CSA FT-1
Scope of delivery and accessories	
Scope of delivery	PZVK: 4 pvc dust covers for unused sockets
Picture	
Drawing	

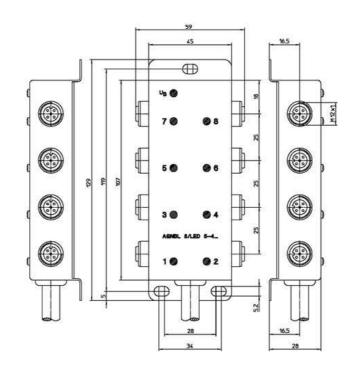

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.